

MARKETED BY  
**AVITUS**

**AVITUS**

**6H**  
1.5 mm  
ANTISCRATCH

**AVITUS**

**6H** | 1.5 mm ANTISCRATCH



LIFE BECOMES  
**COLORFUL** WITH US



GERMAN  
TECHNOLOGY

Interior  
portfolio  
2023-24



**AVITUS**  
6H | 1.5 mm ANTISCRATCH

## about us

AVITUS is a leading brand offering best in class furniture laminates. The company has attained the technology prowess and expertise It offers a variety of laminates having unique features like innovative designs and distinctive patterns. Keeping the needs of architects and designers in mind, we have created this folder to portray an assembly of modern and trendy laminates suiting the needs of a classic attic and even contemporary abodes.



## COLLECTIONS

Available in Size : 2440mm x 1220mm (8 Feet x 4 Feet) Thickness : 1.5mm (± 10%)

### GENERAL USE & CARE GUIDE

AVITUS LAMINATES are manufactured with aesthetics and durability in mind. when used as recommended and with appropriate care, our acrylic will last through the years. AVITUS LAMINATES are easy to maintain.

### ACRYLIC

Cleaning Should be done with water and a clean, non-abrasive cloth.

To remove more stubborn stains, use mild household cleansers like colin IP gently wipe down with a non-abrasive cloth.

Avoid the use of abrasive liquid cleansers, bleaching compounds or solution as these may damage the surface of the acrylic.

Do not place hot cookware directly on the acrylic. Prolonged exposure to temperatures above 30° degree Celsius may cause damage to the acrylic surface.

Do not use the acrylic for purposes that it is not intended for (E.g. do not iron, chop, hammer or expose the acrylic to open flame.)

Outdoor application of the acrylic with exposure to direct sunlight and weather conditions are not recommended.

UV rays may reshape the acrylic.

Gloss surfaces are recommended only for vertical application.

Do not use thinner and toluene on the surface of the AVITUS LAMINATES this may cause decolorization of the surface.


Store the acrylics at temperature below 30 degree celsius.

Typically conform to internationally recognized technical standards.

Have a thickness balance of +/- 10%

Peel off the protective film within 15 days of installation

## APPLICATIONS



## THE WAYS YOU CAN ENJOY THE ROYALNESS OF AVITUS ACRYLIC LAMINATES TO MAKE YOUR DREAMS ALIVE IN A SMART WAY.

- To avoid the problems of air bubbles appearing and any yellow colour dullness or yellow patches problem in the acrylic sheet after installation of AVITUS LAMINATES Customer should know some facts before buying AVITUS LAMINATES.
- As AVITUS LAMINATES is 6H Acrylic acrylic which have the scratch resistance characteristic and look like back painted glass colour acrylic. Please Follow some fact about installation of AVITUS LAMINATES
- Please check the acrylic at the time of delivery, check it whether it was not damaged in transportation & handling and then use for installation.
- Before installing AVITUS LAMINATES make sure that substrate (Plywood MDF, Particle Board) is good calibrated and evenly surfaced.
- If there is usage of any inferior quality or not as per standard quality (dipped plywood and dipped lipping patti) kindly scrub dipped colour layer by using sand paper. Then use AVITUS LAMINATES to avoid yellow colour patches.
- Clean the surface of substrate (Plywood, MDF, Particle Board) to make free from dust or grease by cloth, soft brush, sponge or sand paper.
- Always use acrylic glue.
- Stir the adhesive before using it, and do not mix water in adhesive.
- Spread the adhesive uniformly by brush, roller or adhesive spreader on both AVITUS LAMINATES and substrate (Plywood, MDF, Particle Board).
- Use soft pinch roller or normal pressing technique at the time of pressing AVITUS LAMINATES on the substrate (Plywood, MDF, Particle Board). And also pressing should be done from the middle of the panel and move towards to side line and corners of panel. So that air between the AVITUS LAMINATES and substrate (Plywood, MDF, Particle Board) will be Removed.
- Please make sure, to give sufficient amount of pressing to AVITUS LAMINATES for almost 24hrs to achieve full bonding strength.
- Please do not use synthetic rubber adhesive (SR, JAT Pat, Bostic, Heatxetc.)
- After the installation of AVITUS LAMINATES acrylic please avoid direct sunlight on it.
- Please don't place hot cookware directly on the AVITUS LAMINATES Prolonged exposure to temperature above 30°C may cause patches to AVITUS LAMINATES.

# AVITUS

6H | 1.5 mm ANTISCRATCH

### WHY AIR BUBBLE APPEARS IN BETWEEN ACRYLIC AND SUBSTRATE (PLYWOOD, MDF, PARTICLE BOARD) AFTER THE INSTALLATION?

The reasons which lead to air bubble problems are

Bonding of acrylic under high humidity atmosphere

Using of water base synthetic resin adhesive or other than PEVA (Polyethylene Vinyl Acetate Co-polymer) adhesive may also lead to air bubble after the installation acrylic.

Many times due to uncertain weather conditions Substrate (Plywood, MDF, Particle Board) absorbs moisture. after few days of installation acrylic on substrate gradually loses moisture. that moisture is the result of air bubble between acrylic and substrate after installation

Using odd uneven surface Substrate (Plywood, MDF, Particle Board) Lead to debone at particular area of acrylic sheet and air bubble appear at that area after the installation

Lack of pressing and short period of pressing at the time of bonding period of Acrylic also lead to air bubble after the installation of acrylic.

### WHY YELLOW PATCHES AND COLOUR FADE PROBLEM APPEARS AFTER THE INSTALLATION OF ACRYLIC?

The reason behind these problems are as follows :

When Acrylic experiences the direct fall of sunlight it leads to discolouring, fading and yellowness in acrylic.

Using of inferior quality or not as per standard quality dipped plywood & dipped lipping patti may lose the colour due to chemical reaction between adhesive at the time of bonding, yellow patches appear after the installation.

Using of synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) will lead to brown colour patches on Acrylic.

Prolonged exposure temperature to above 30° or placing hot cookware directly on the Acrylic cause patches on Acrylic surface.



*dummy text*




**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY



## FLUTED PANEL




CN FT01 - 10100 PR 

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS



CN FT01 - 10503 PR 



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm

ANTISCRATCH



01

02

*dummy text*



**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY



## FLUTED PANEL



CN FT01 - 10501 PR

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS



CN FT01 - 10502 PR



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT




WATER  
RESISTANT



6H  
1.5 mm

ANTISCRATCH



01


02

*dummy text*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY



## FLUTED PANEL



CN FT01 - 10113 PR

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS



CN FT01 - 10201 PR



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm  
ANTISCRATCH




01



02

*dummy text*

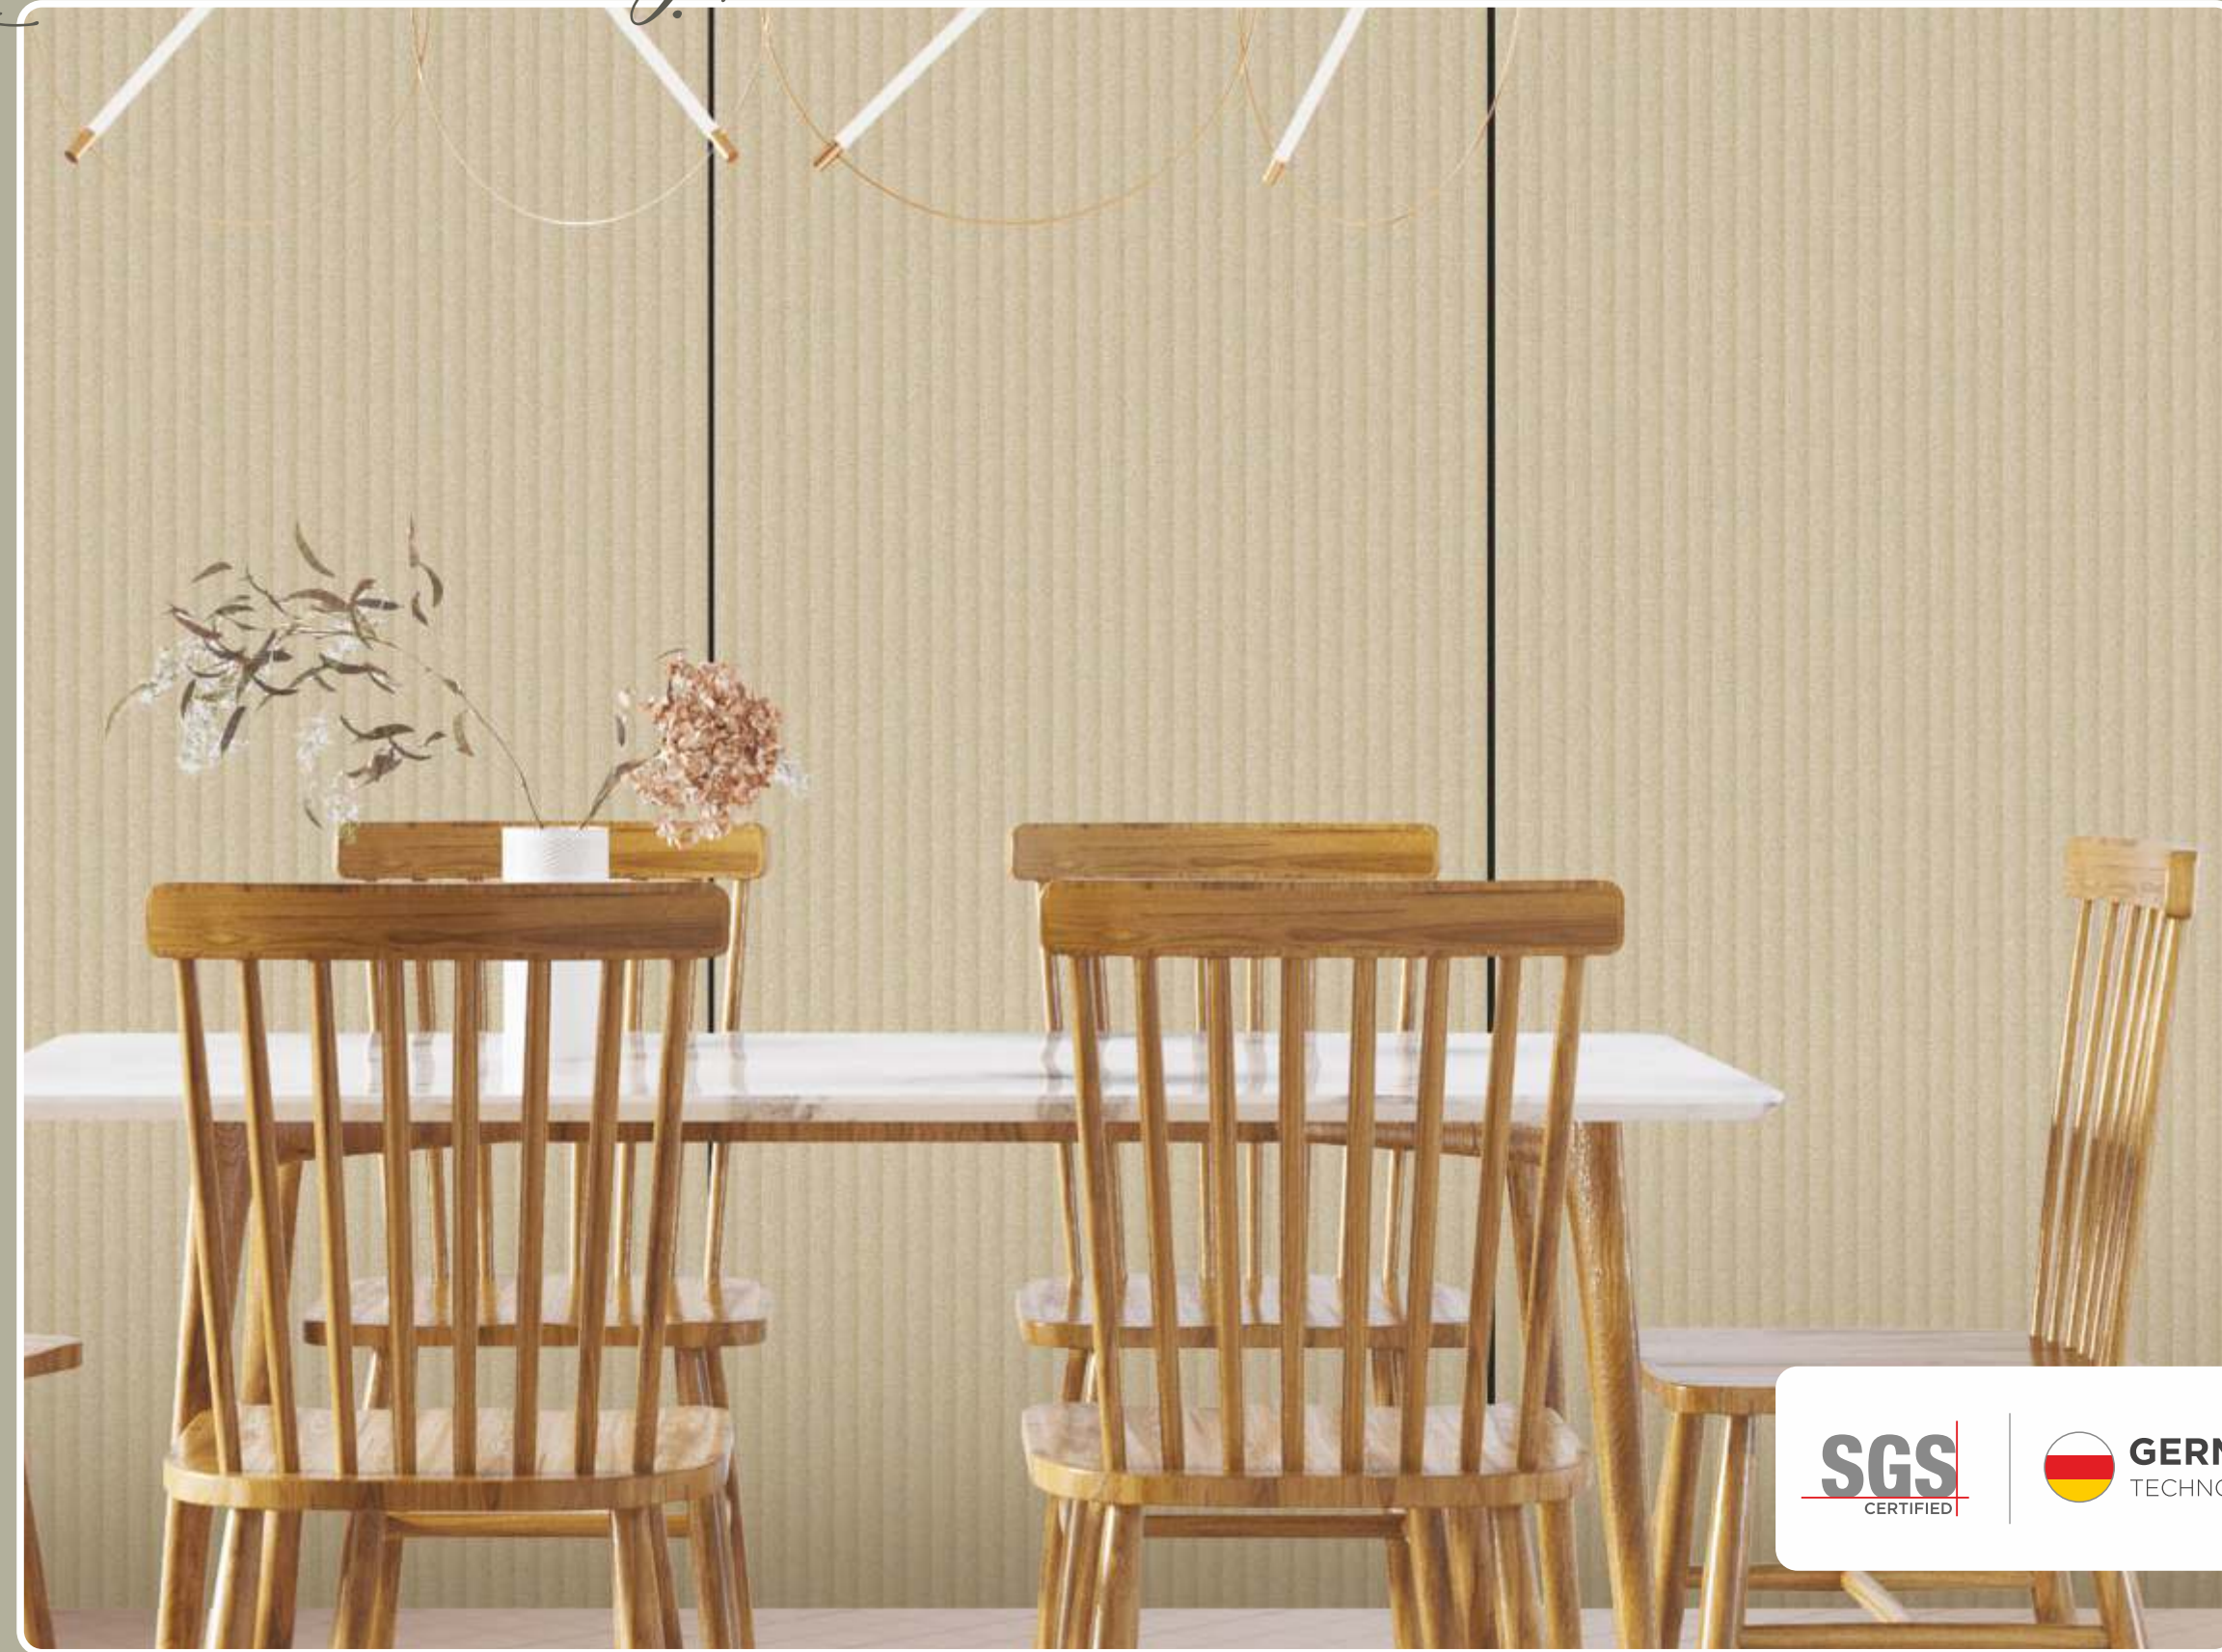


**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY



## FLUTED PANEL

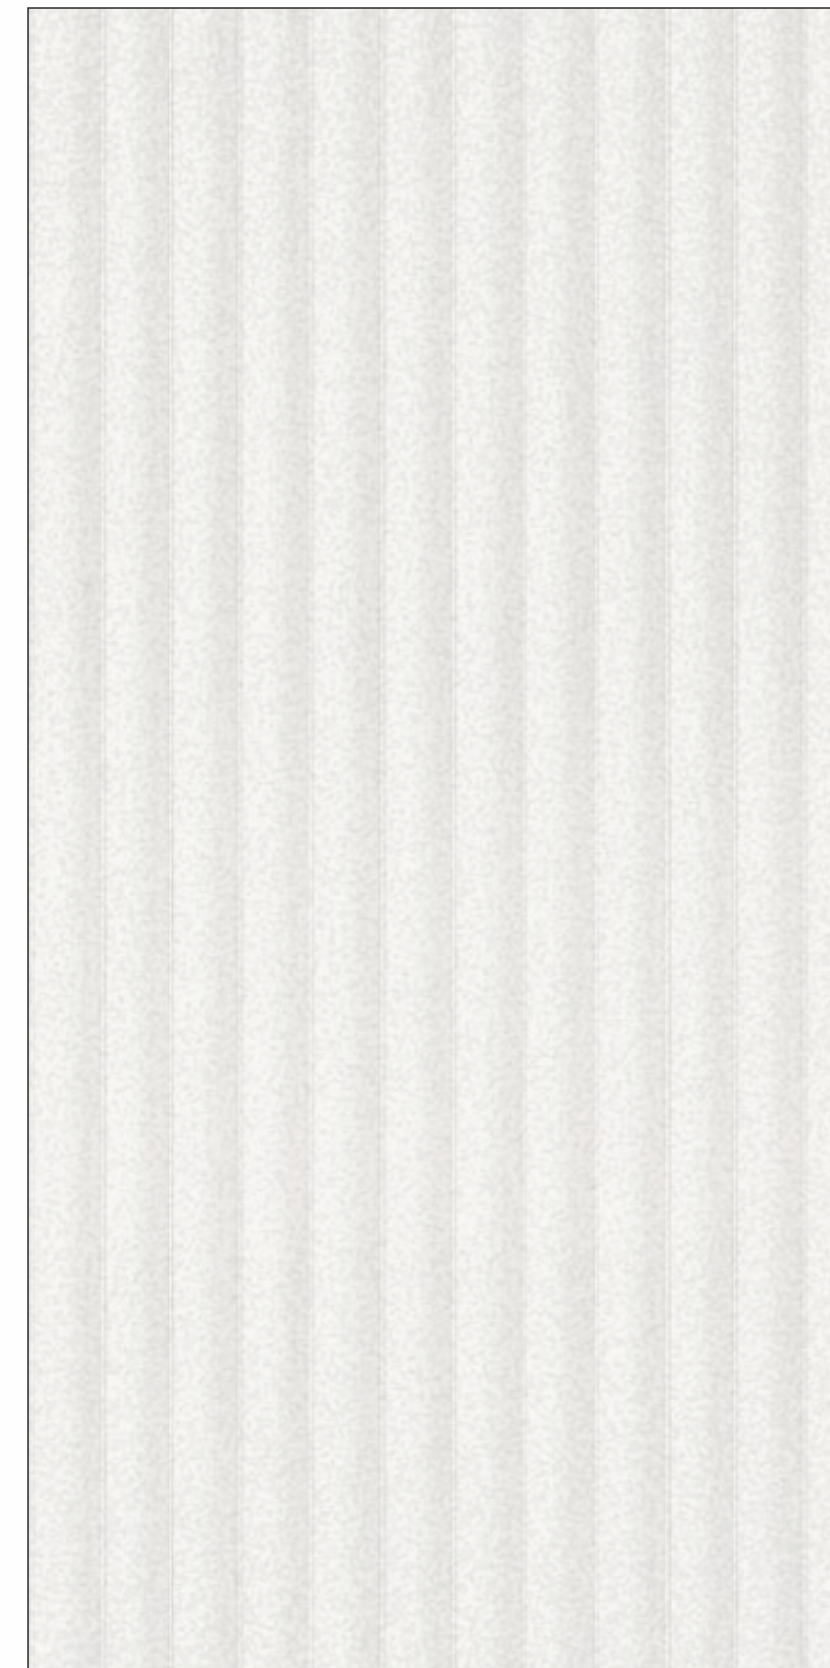

CN FT01 - 39 SP

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS



CN FT01 - 47 SP



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm  
ANTISCRATCH



01



02

*dummy text*




**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY



## FLUTED PANEL

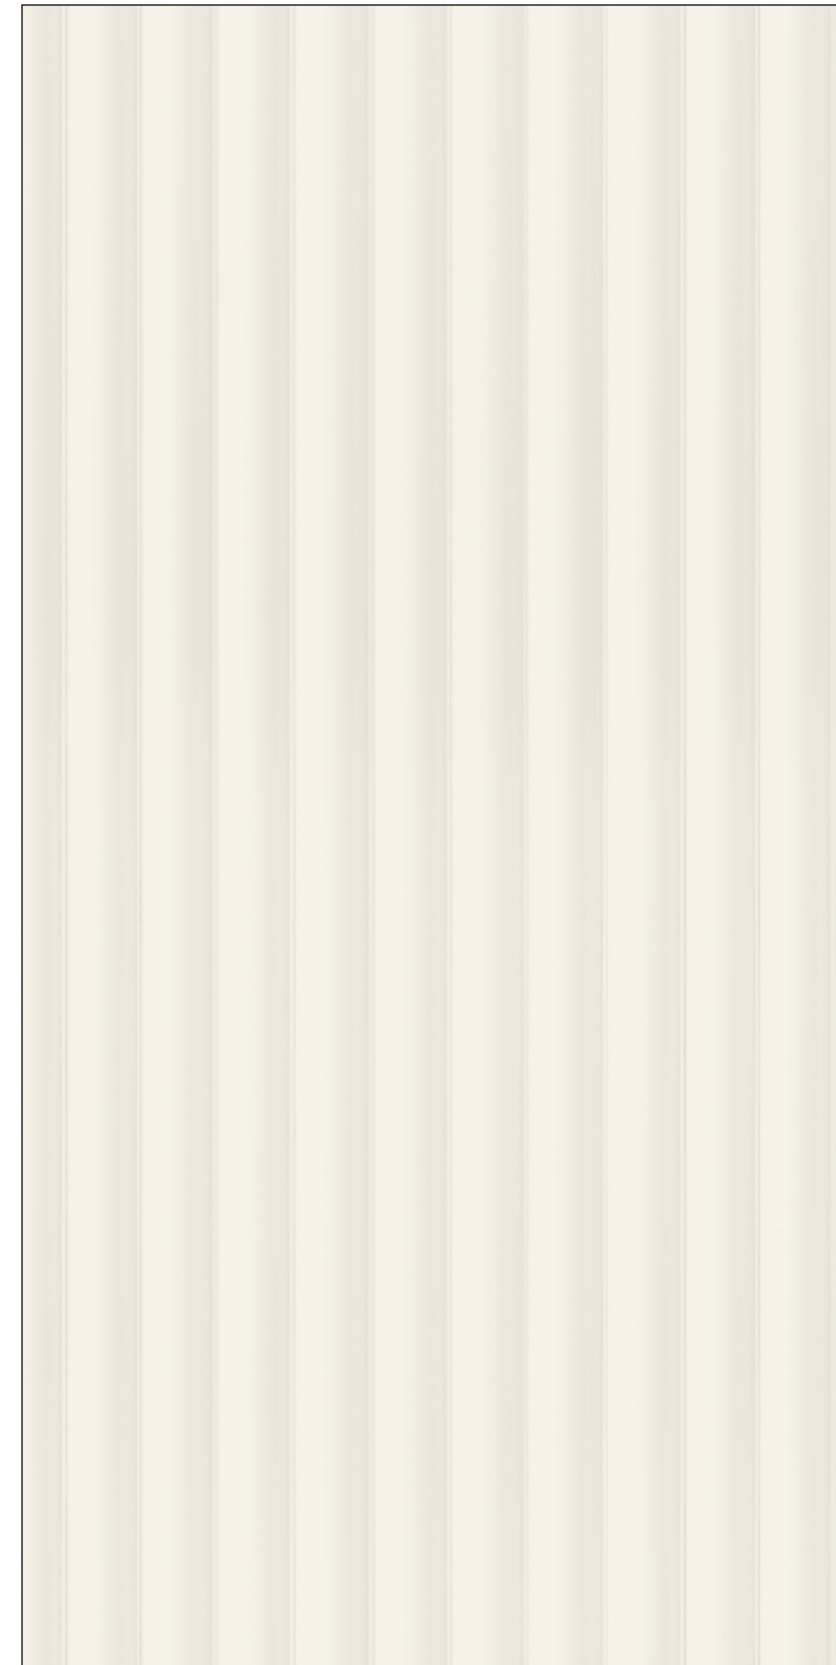

CN FT01 - 25 SP

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS



CN FT0A - 50 SP



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm

ANTISCRATCH



01  
02

*dummy text*




**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY




## FLUTED PANEL

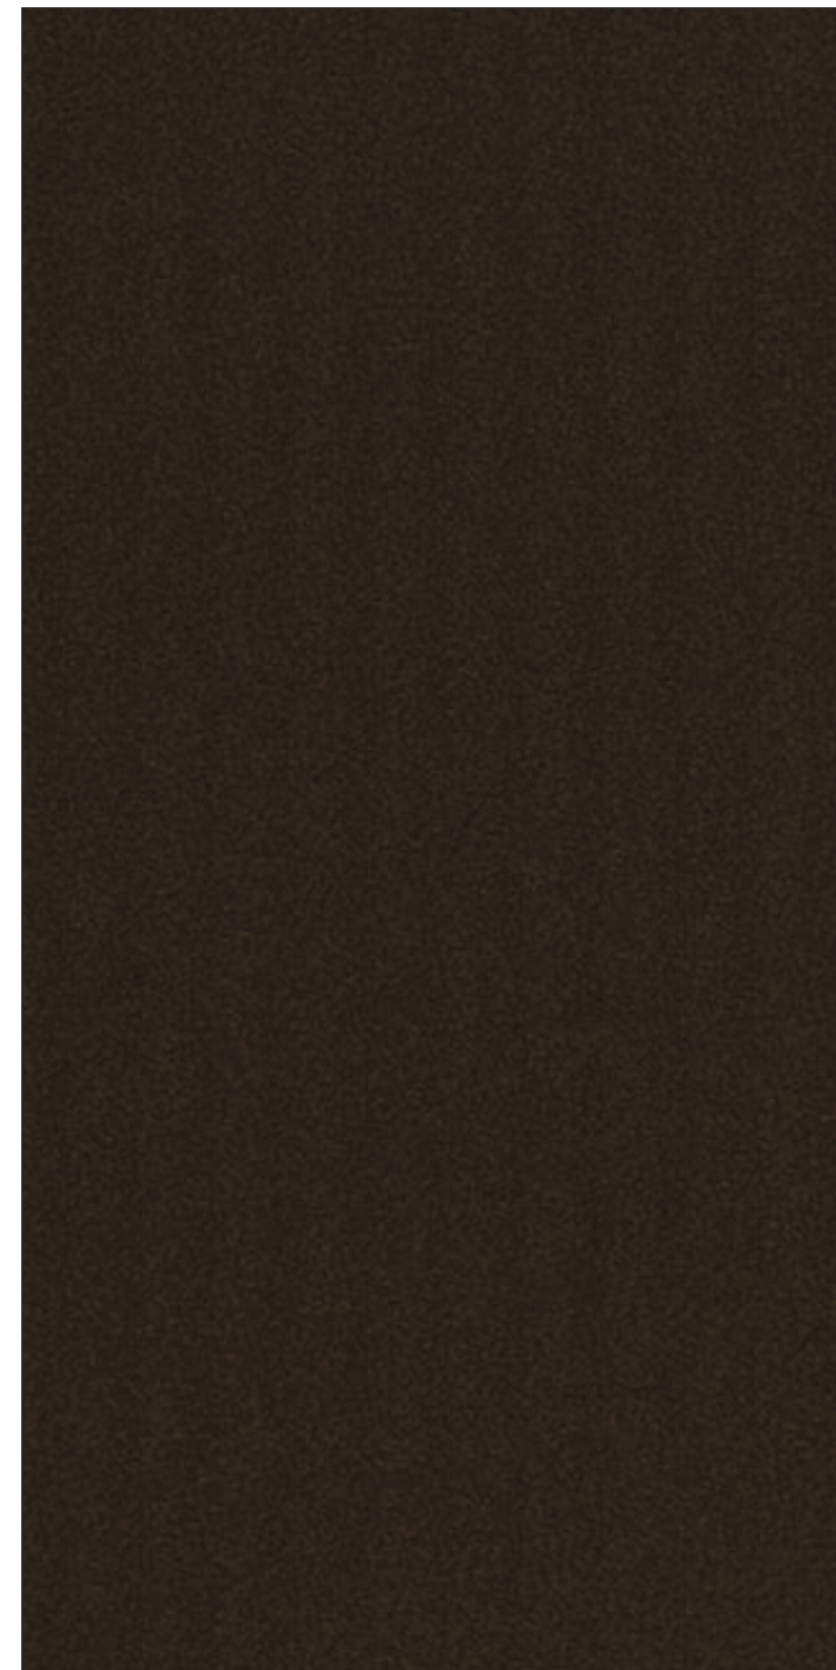

CN FT01 - 26

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS

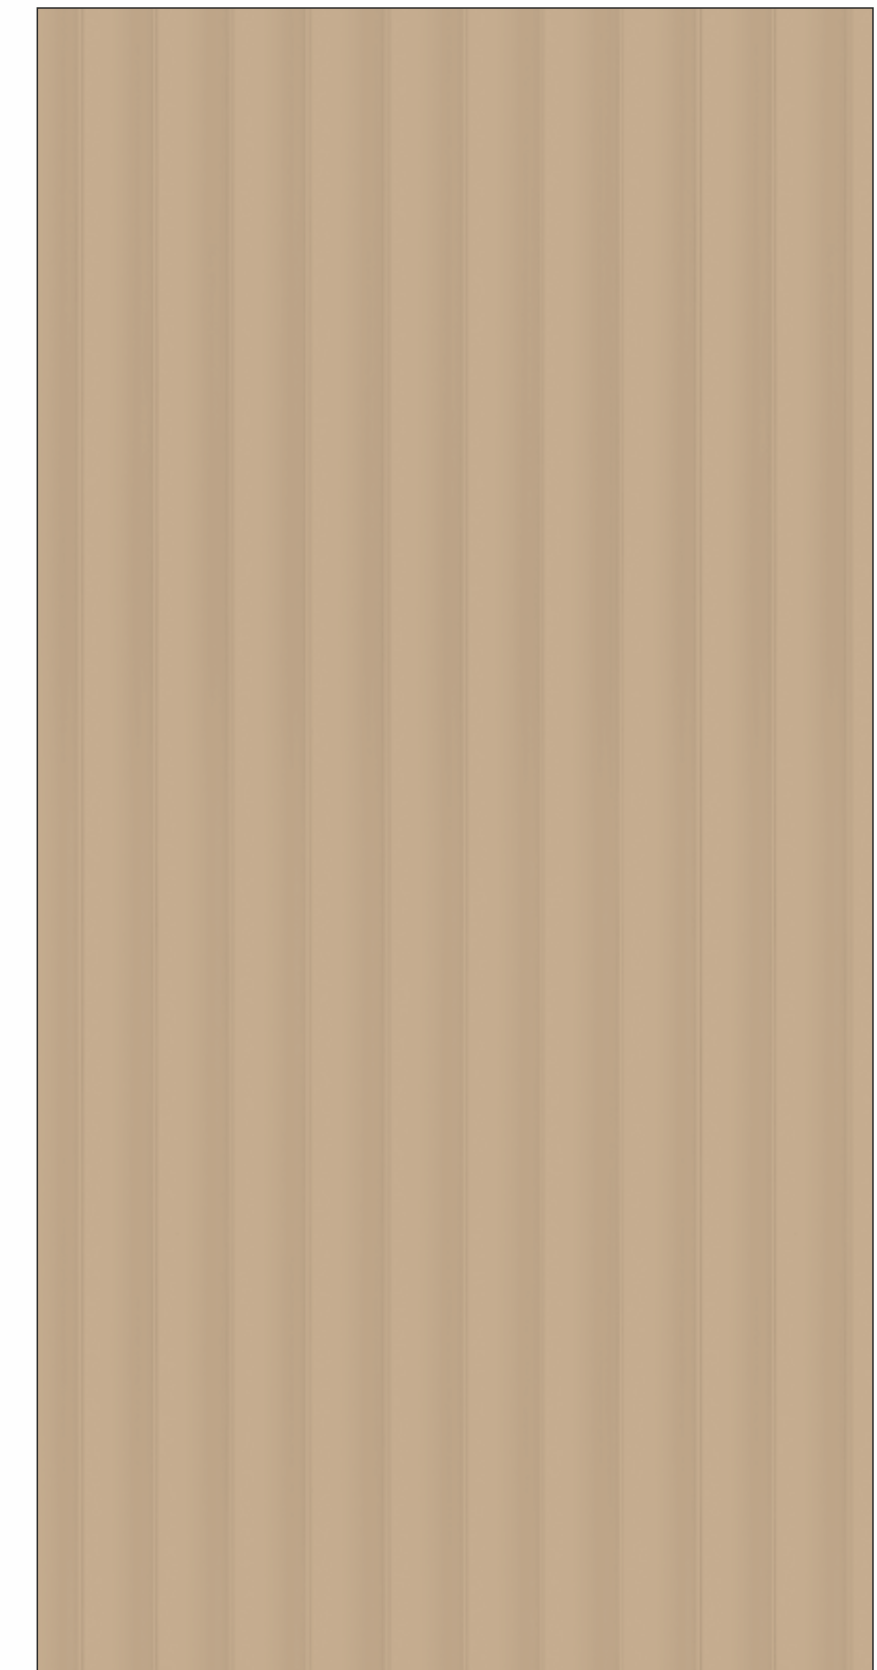

CN FT01 - 20



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT




WATER  
RESISTANT



1.5 mm  
ANTISCRATCH



*dummy text*

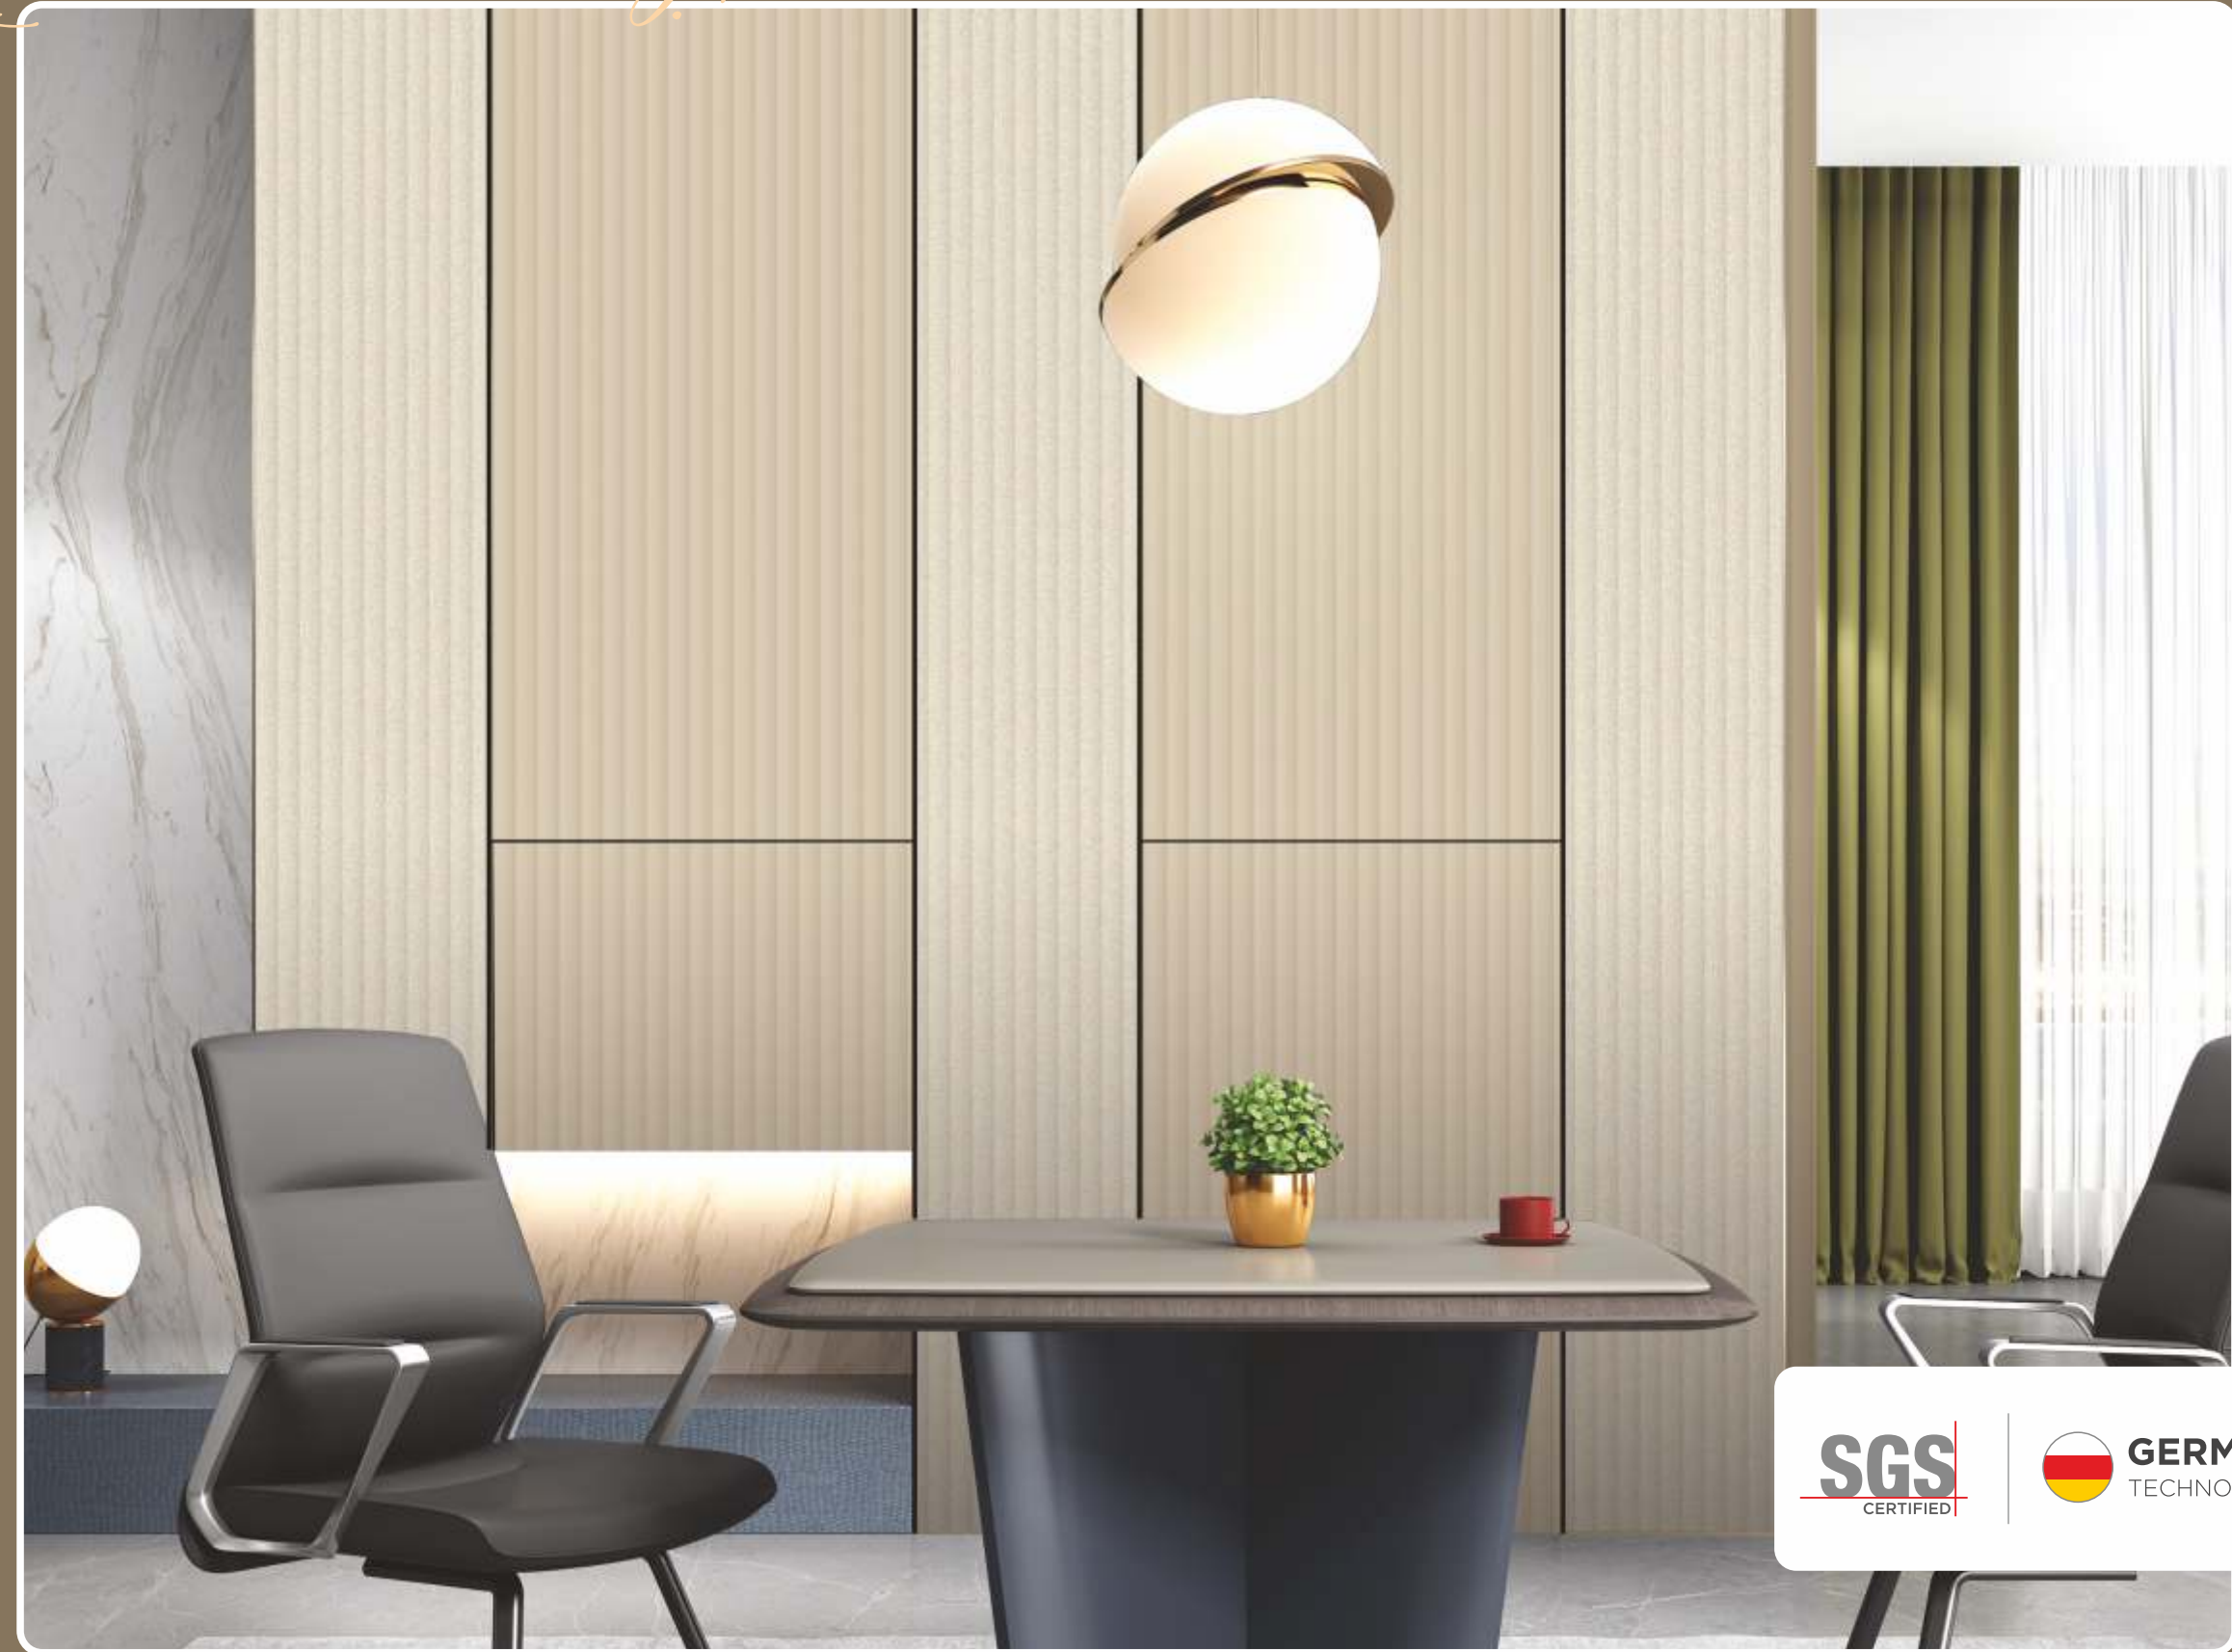


**SGS**  
CERTIFIED

**GERMAN**  
TECHNOLOGY




## FLUTED PANEL

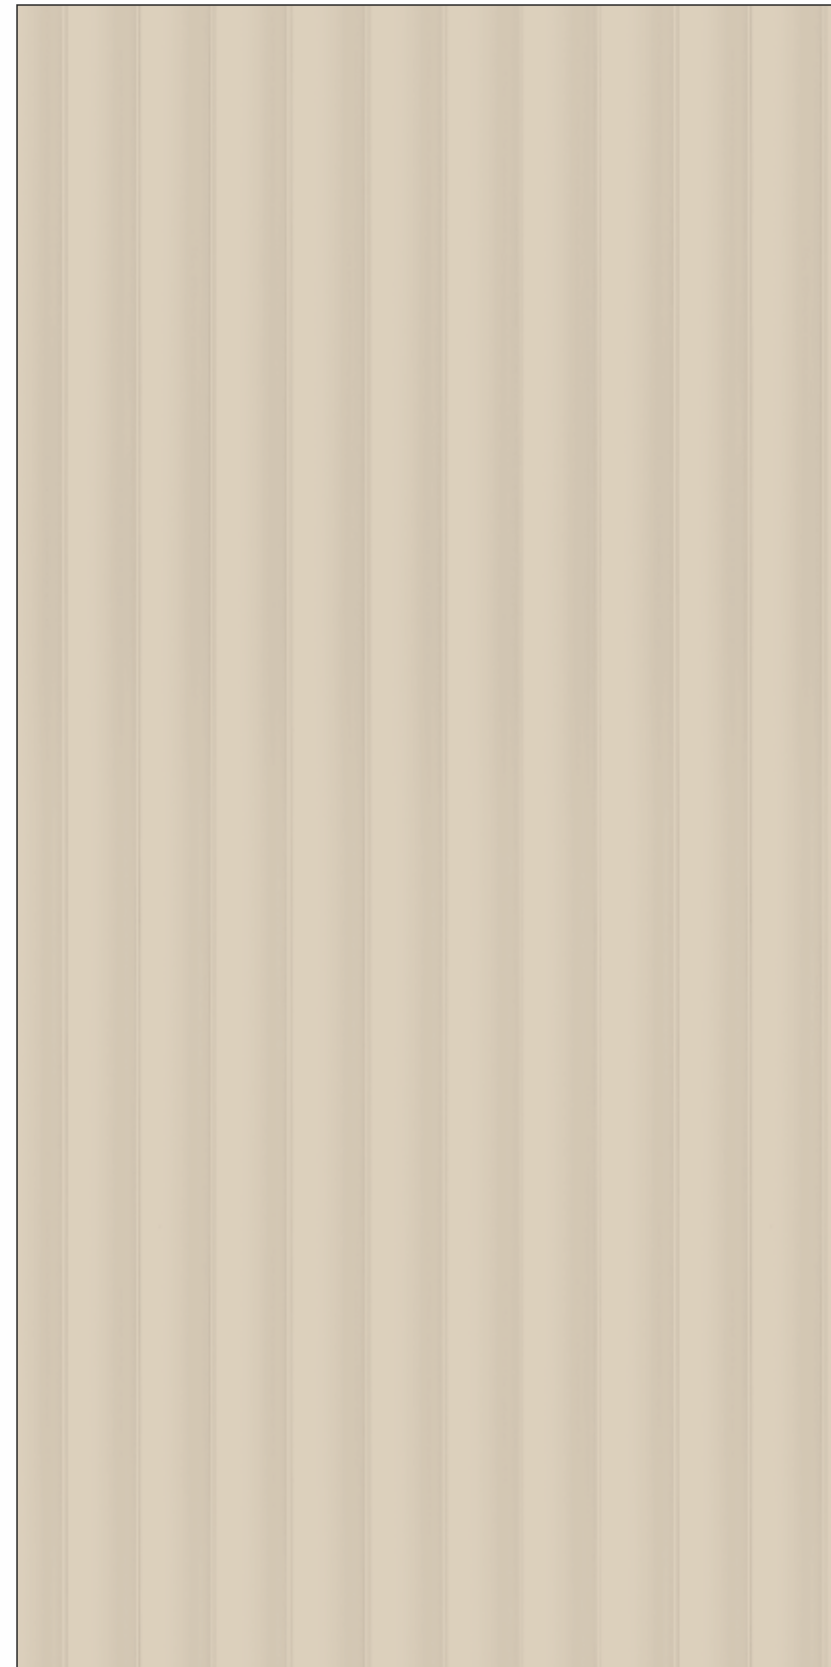

CN FT02 - 21

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS

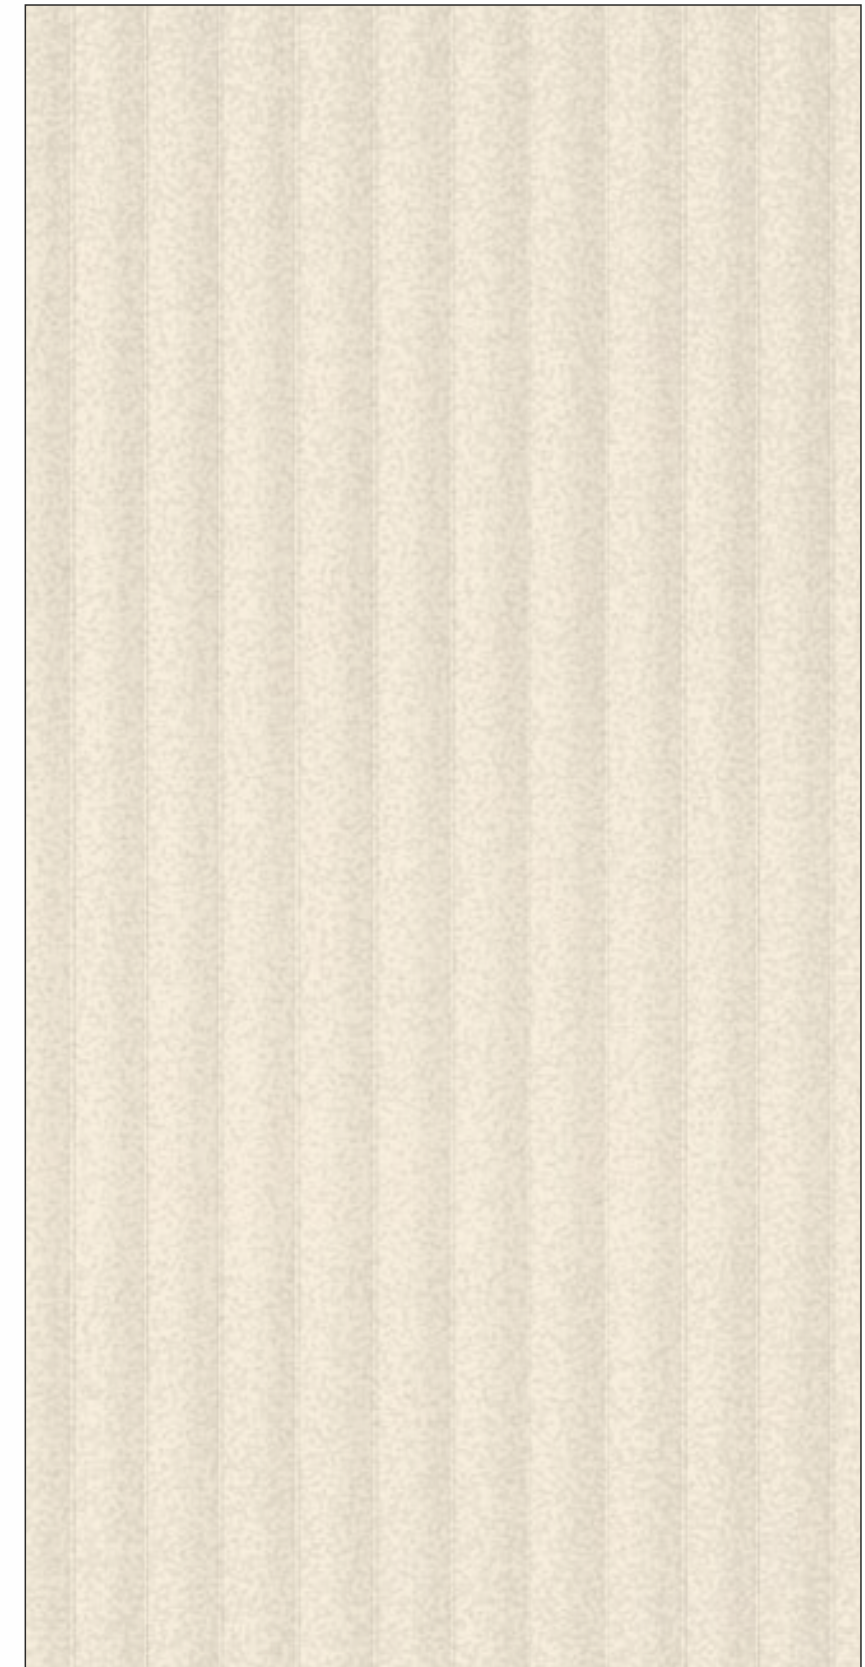

CN FT02 - 52



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



6H  
1.5 mm

ANTISCRATCH



01


02




*dummy text*




SGS  
CERTIFIED

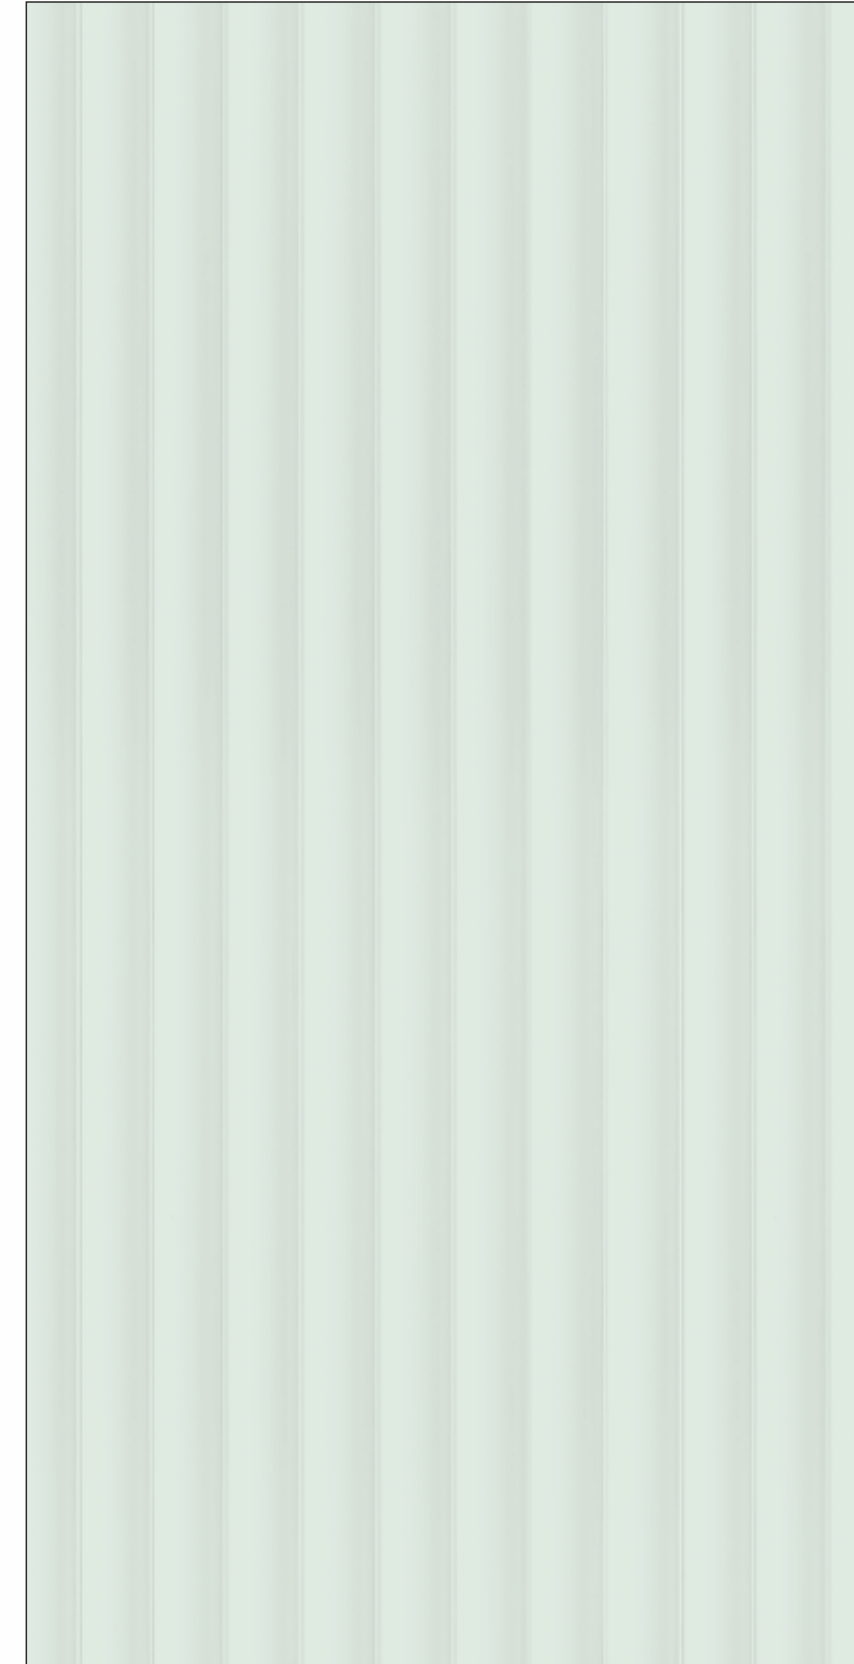

CN FT03 - 13




## FLUTED PANEL

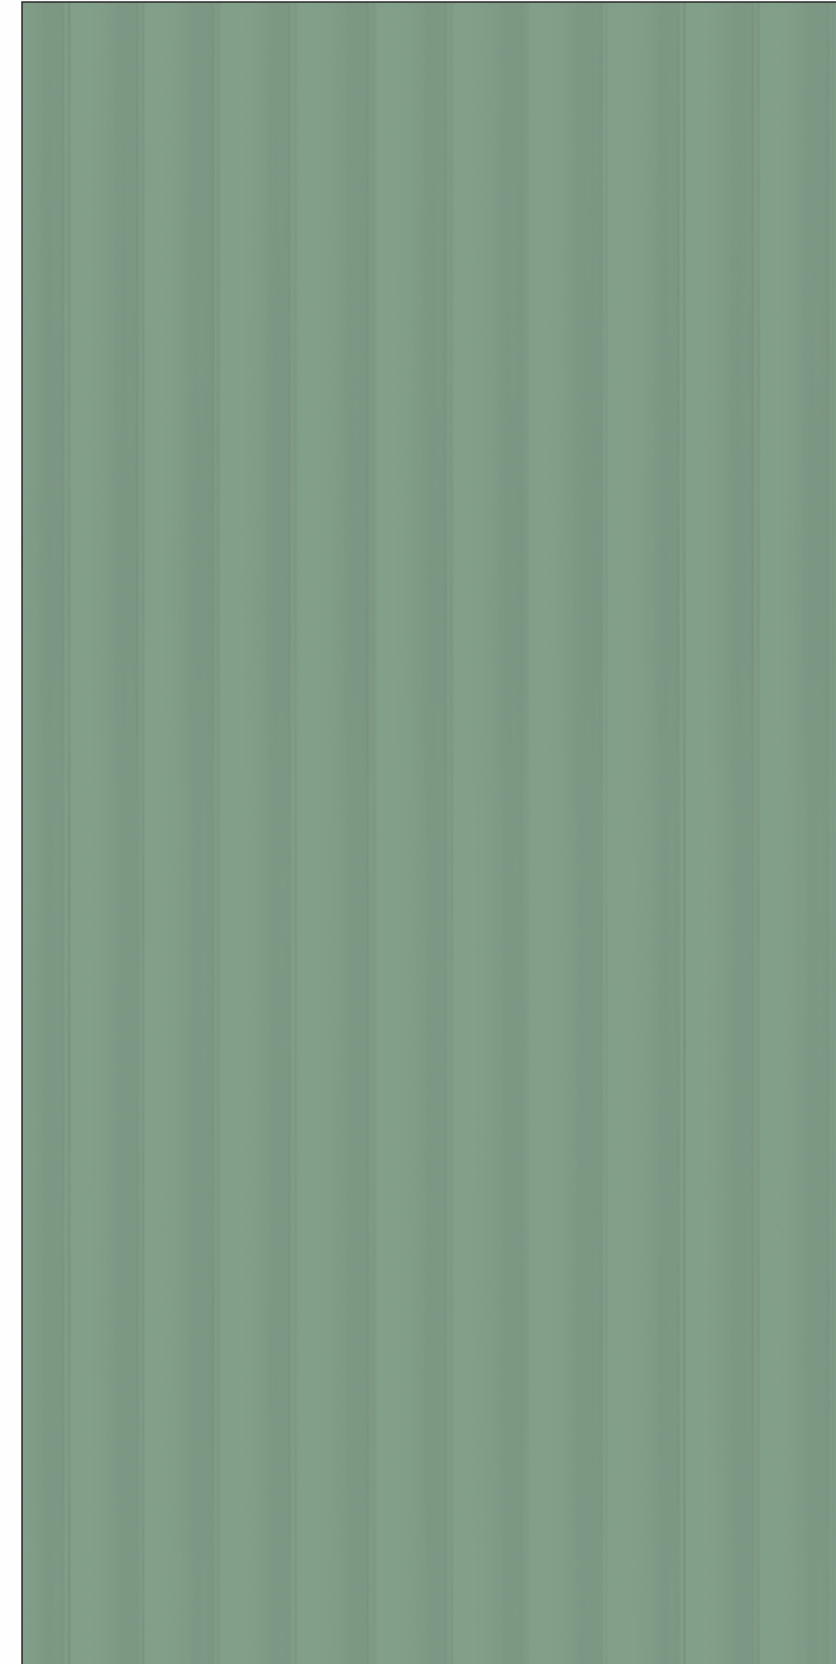

CN FT03 - 40

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS

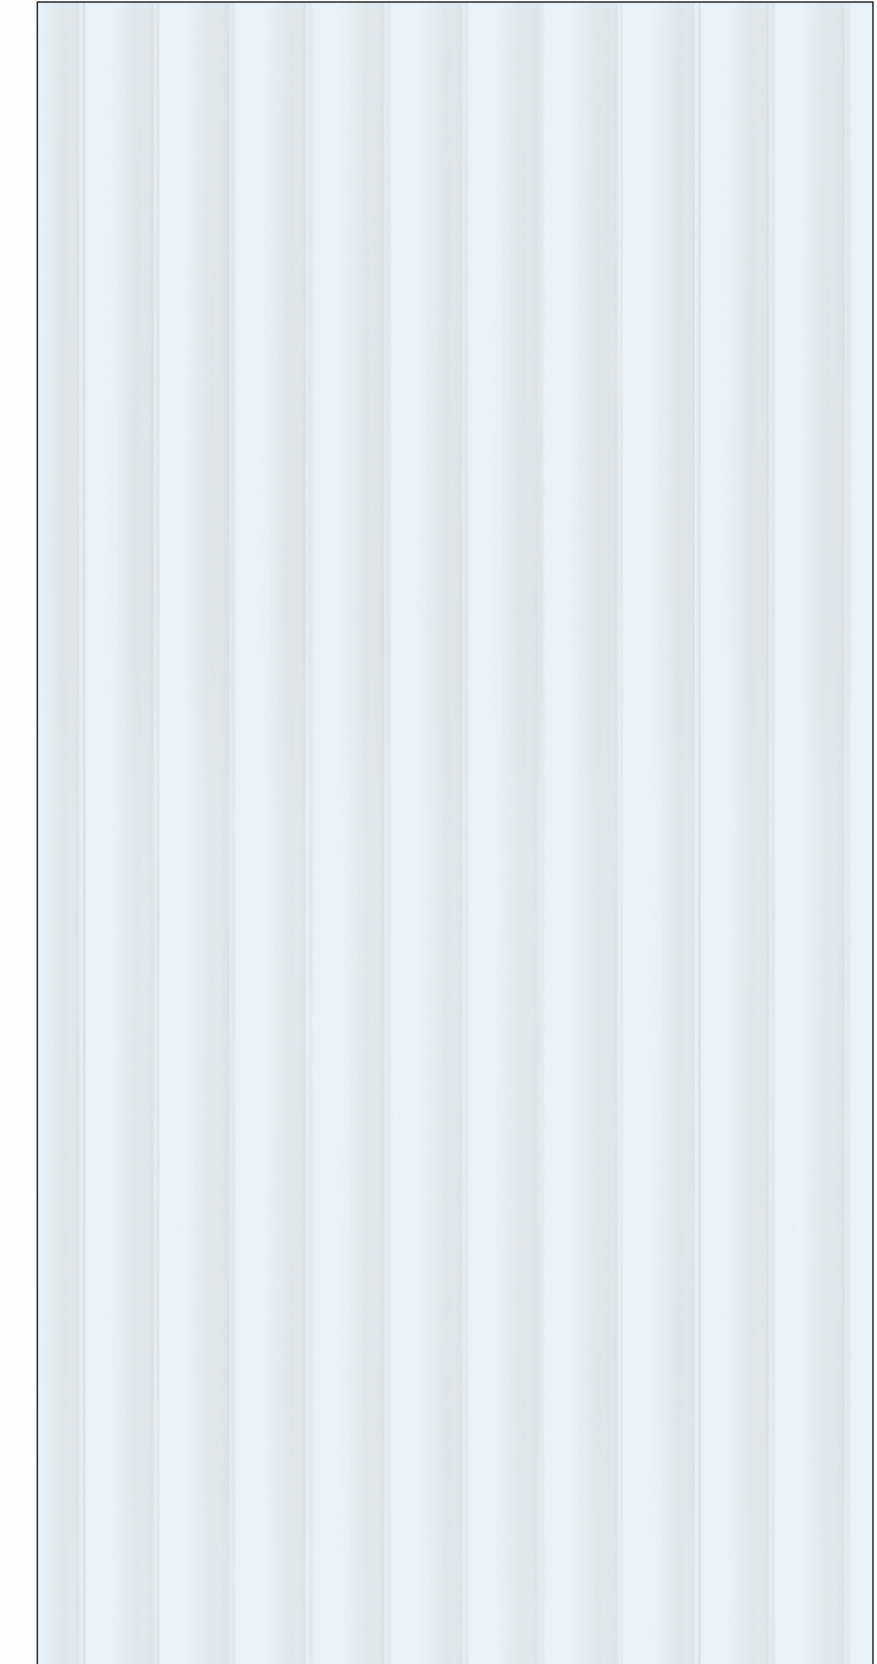

CN FT02 - 64



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



ANTISCRATCH



01  
02




*dummy text*




SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

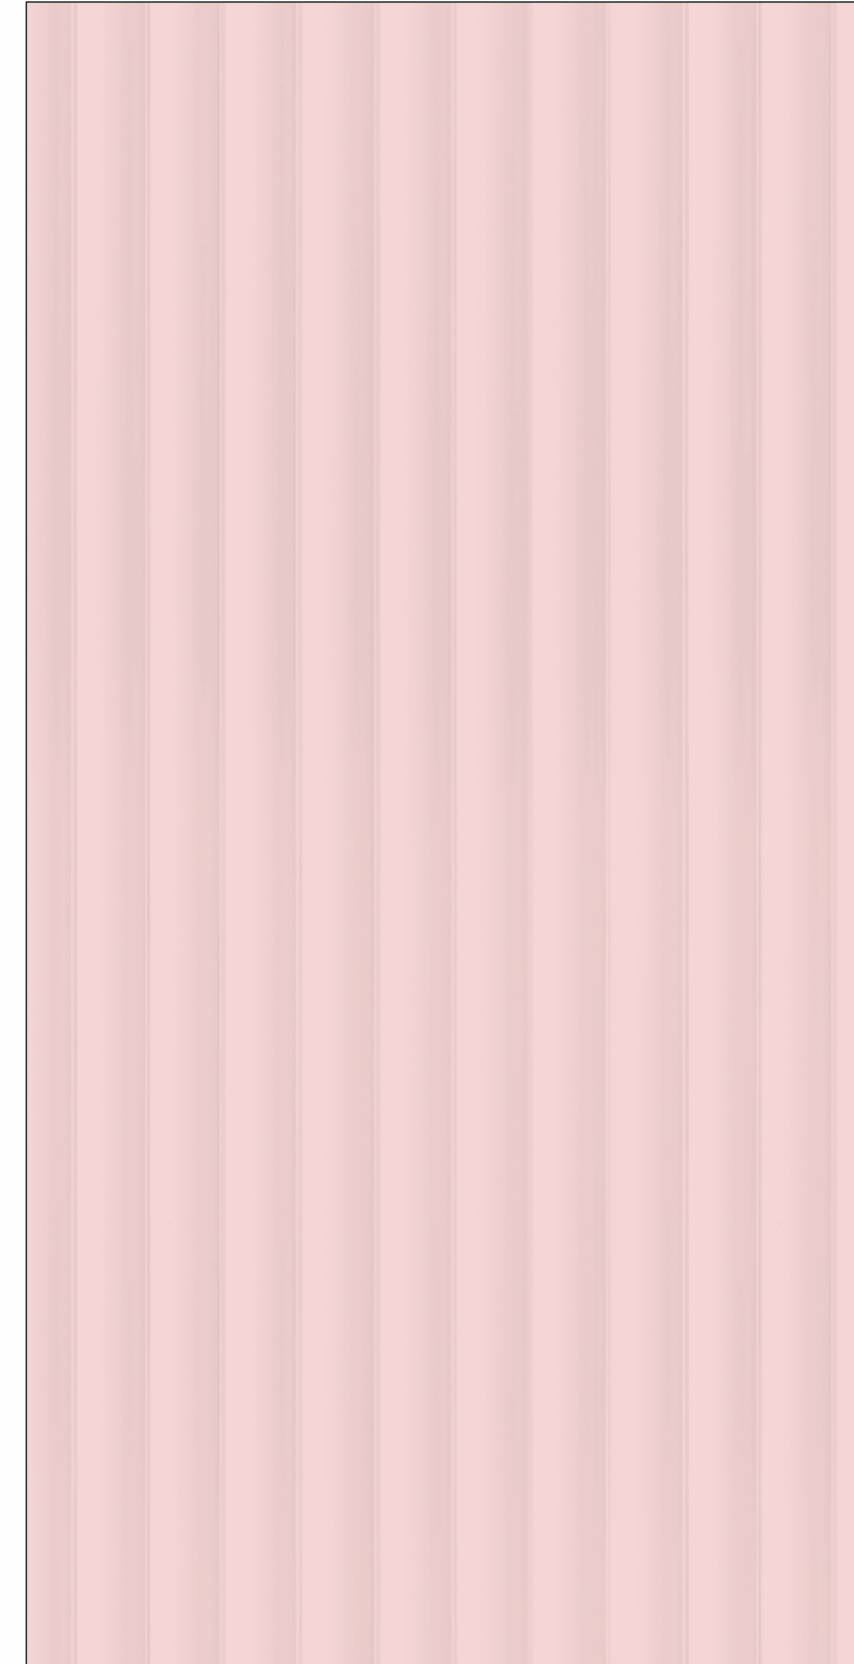

CN FT03 - 2.10




## FLUTED PANEL



CN FT03 - 16

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

## AVITUS

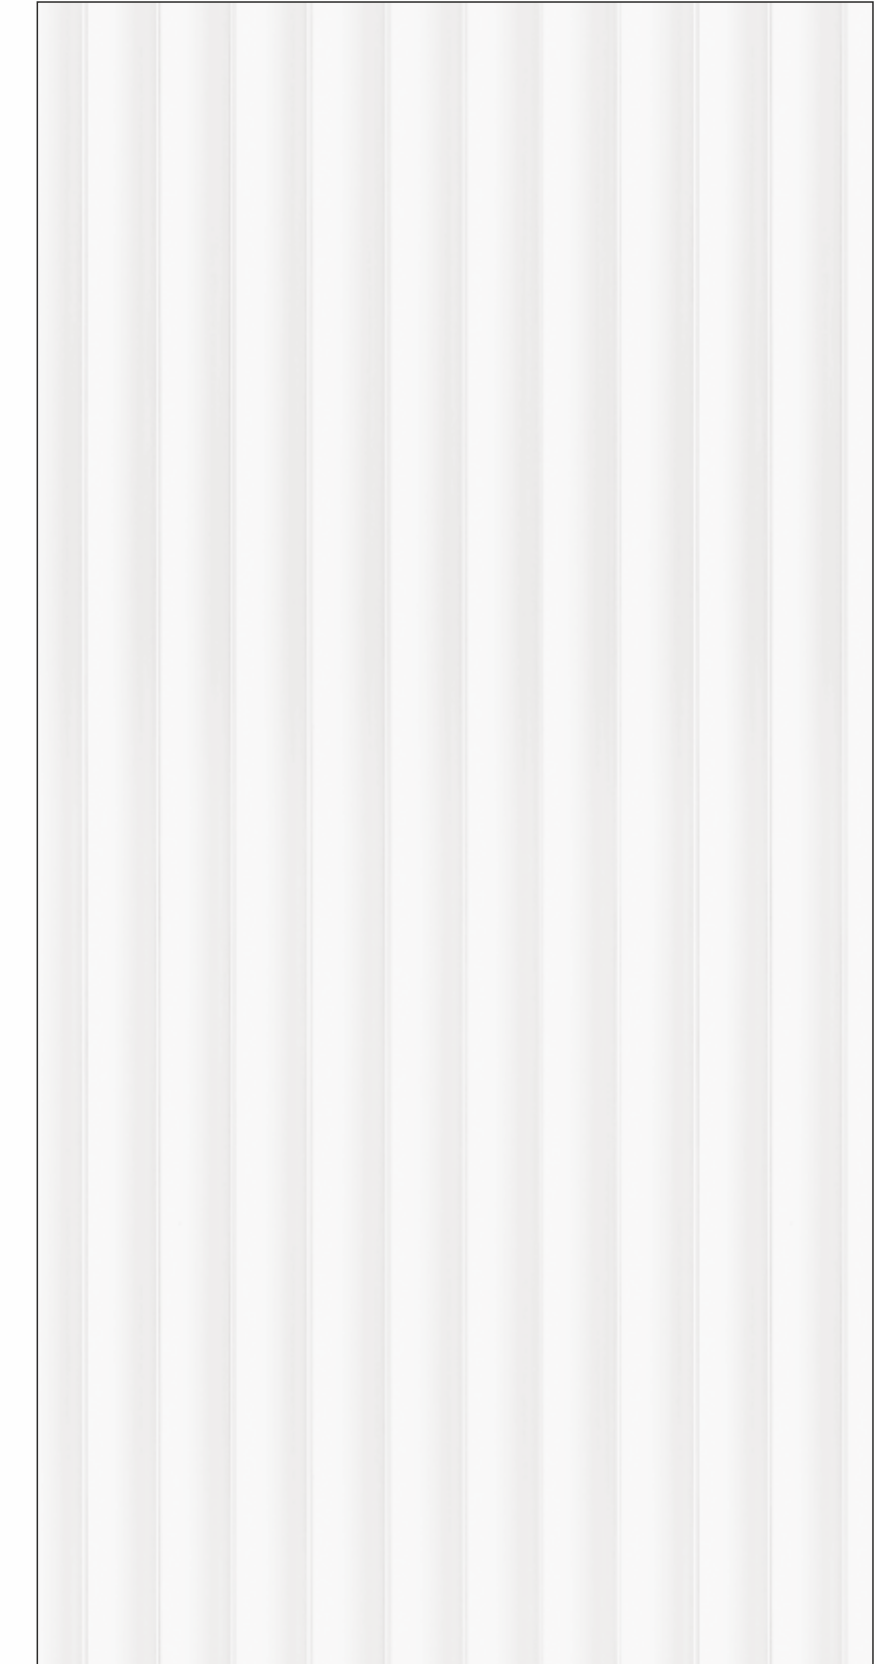

CN FT01 - 11



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm  
ANTISCRATCH



01  
02




*dummy text*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

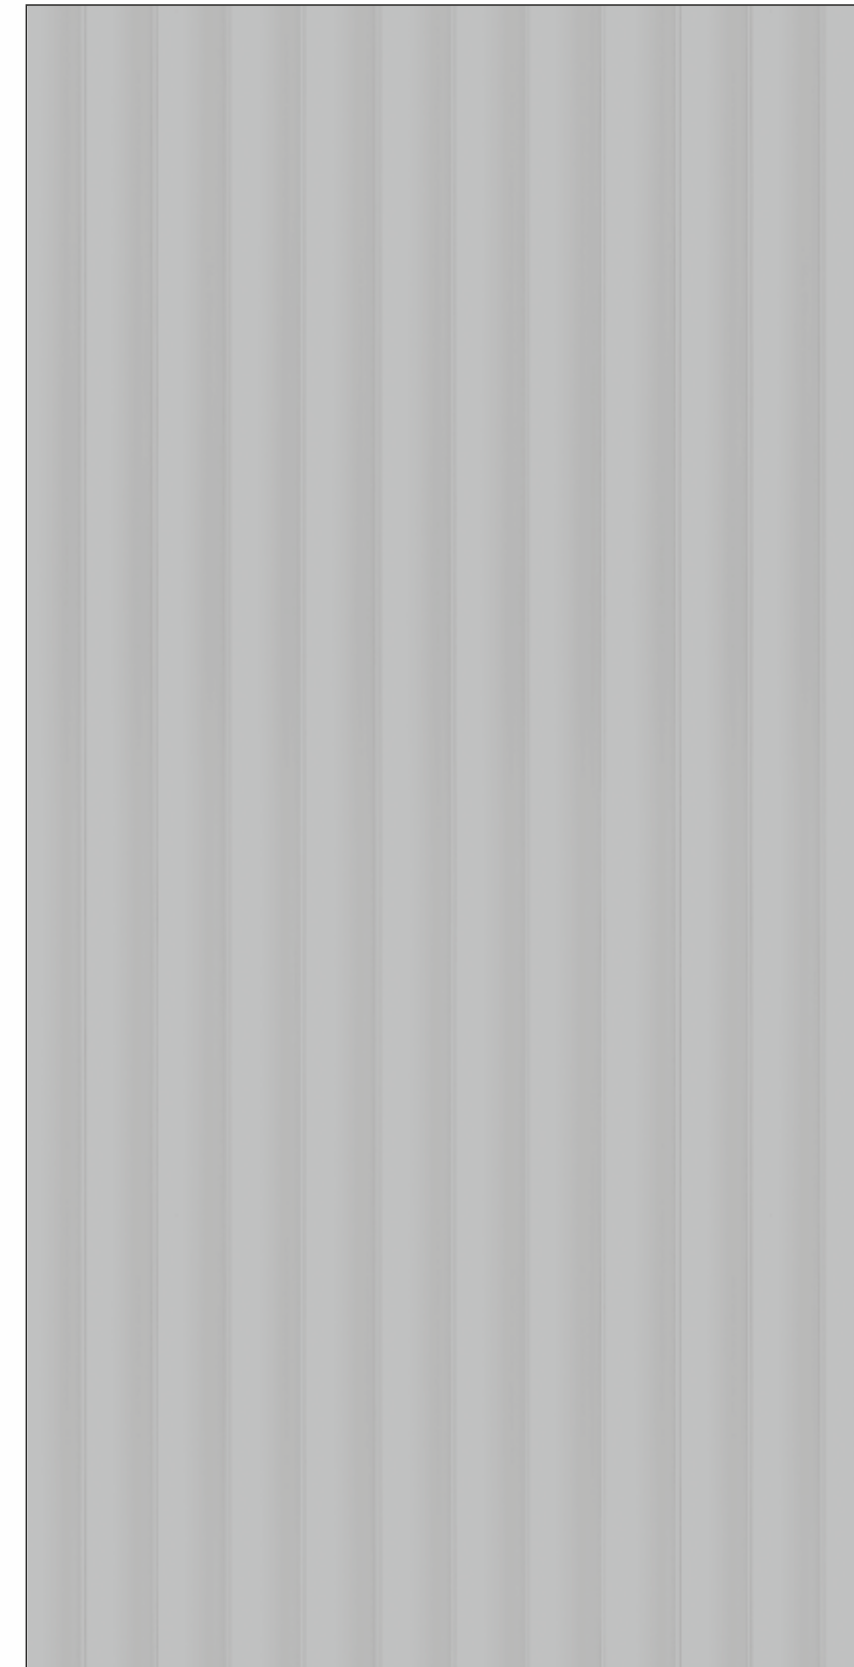

CN FT02 - 19




## FLUTED PANEL



CN FT02 - 15

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

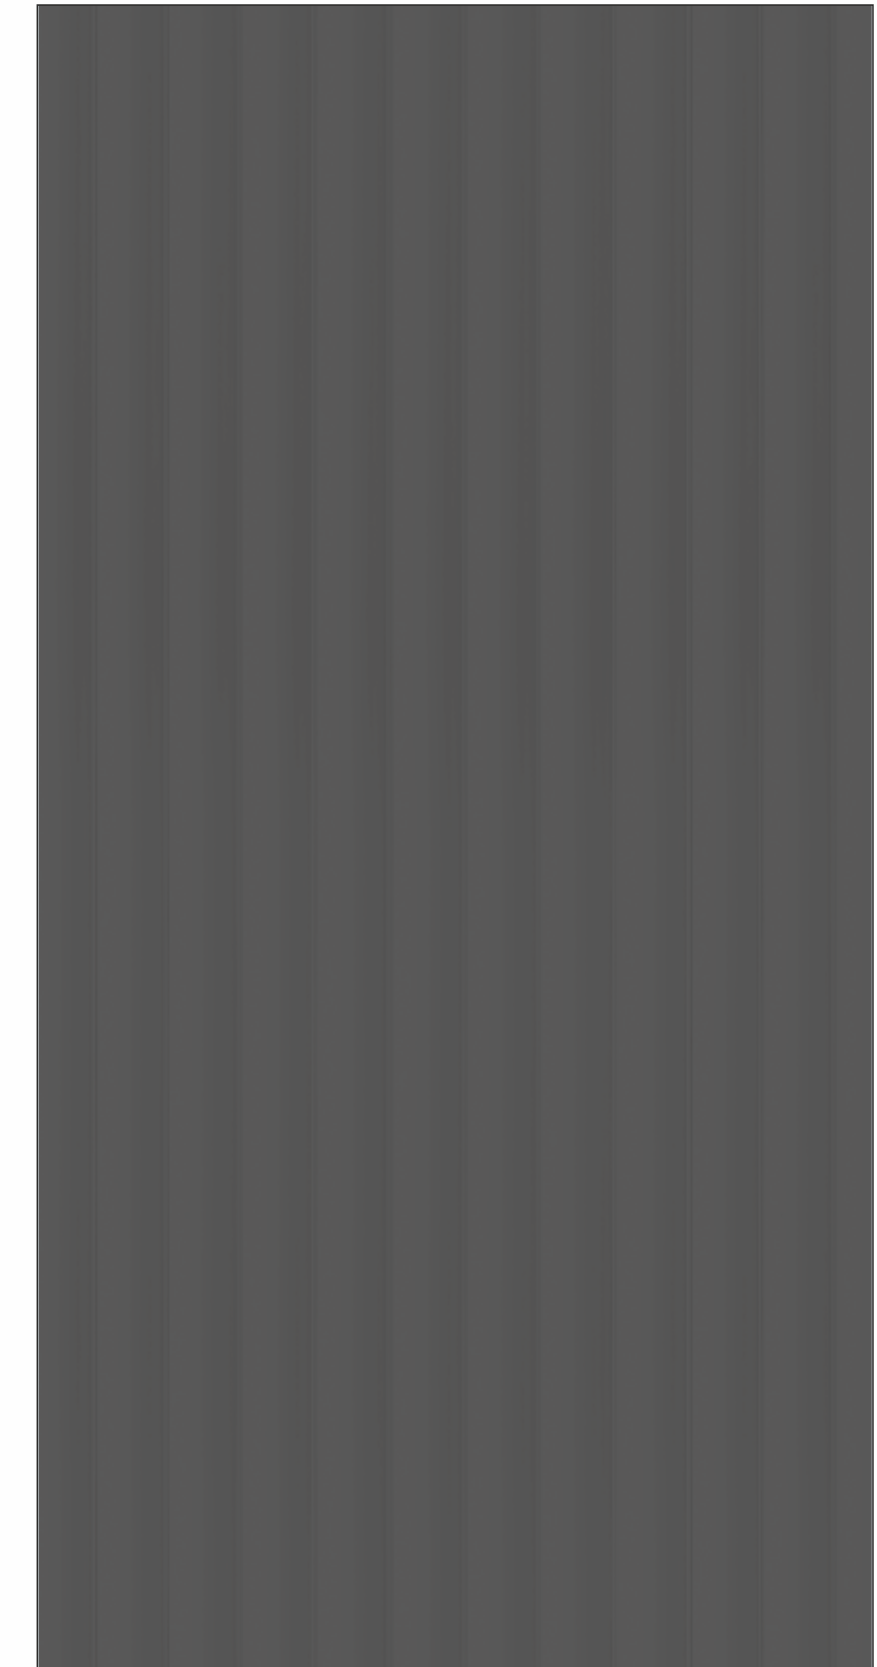

CN FT03 - 18

# AVITUS



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT




6H  
1.5 mm  
ANTISCRATCH



01  
02

*unique*

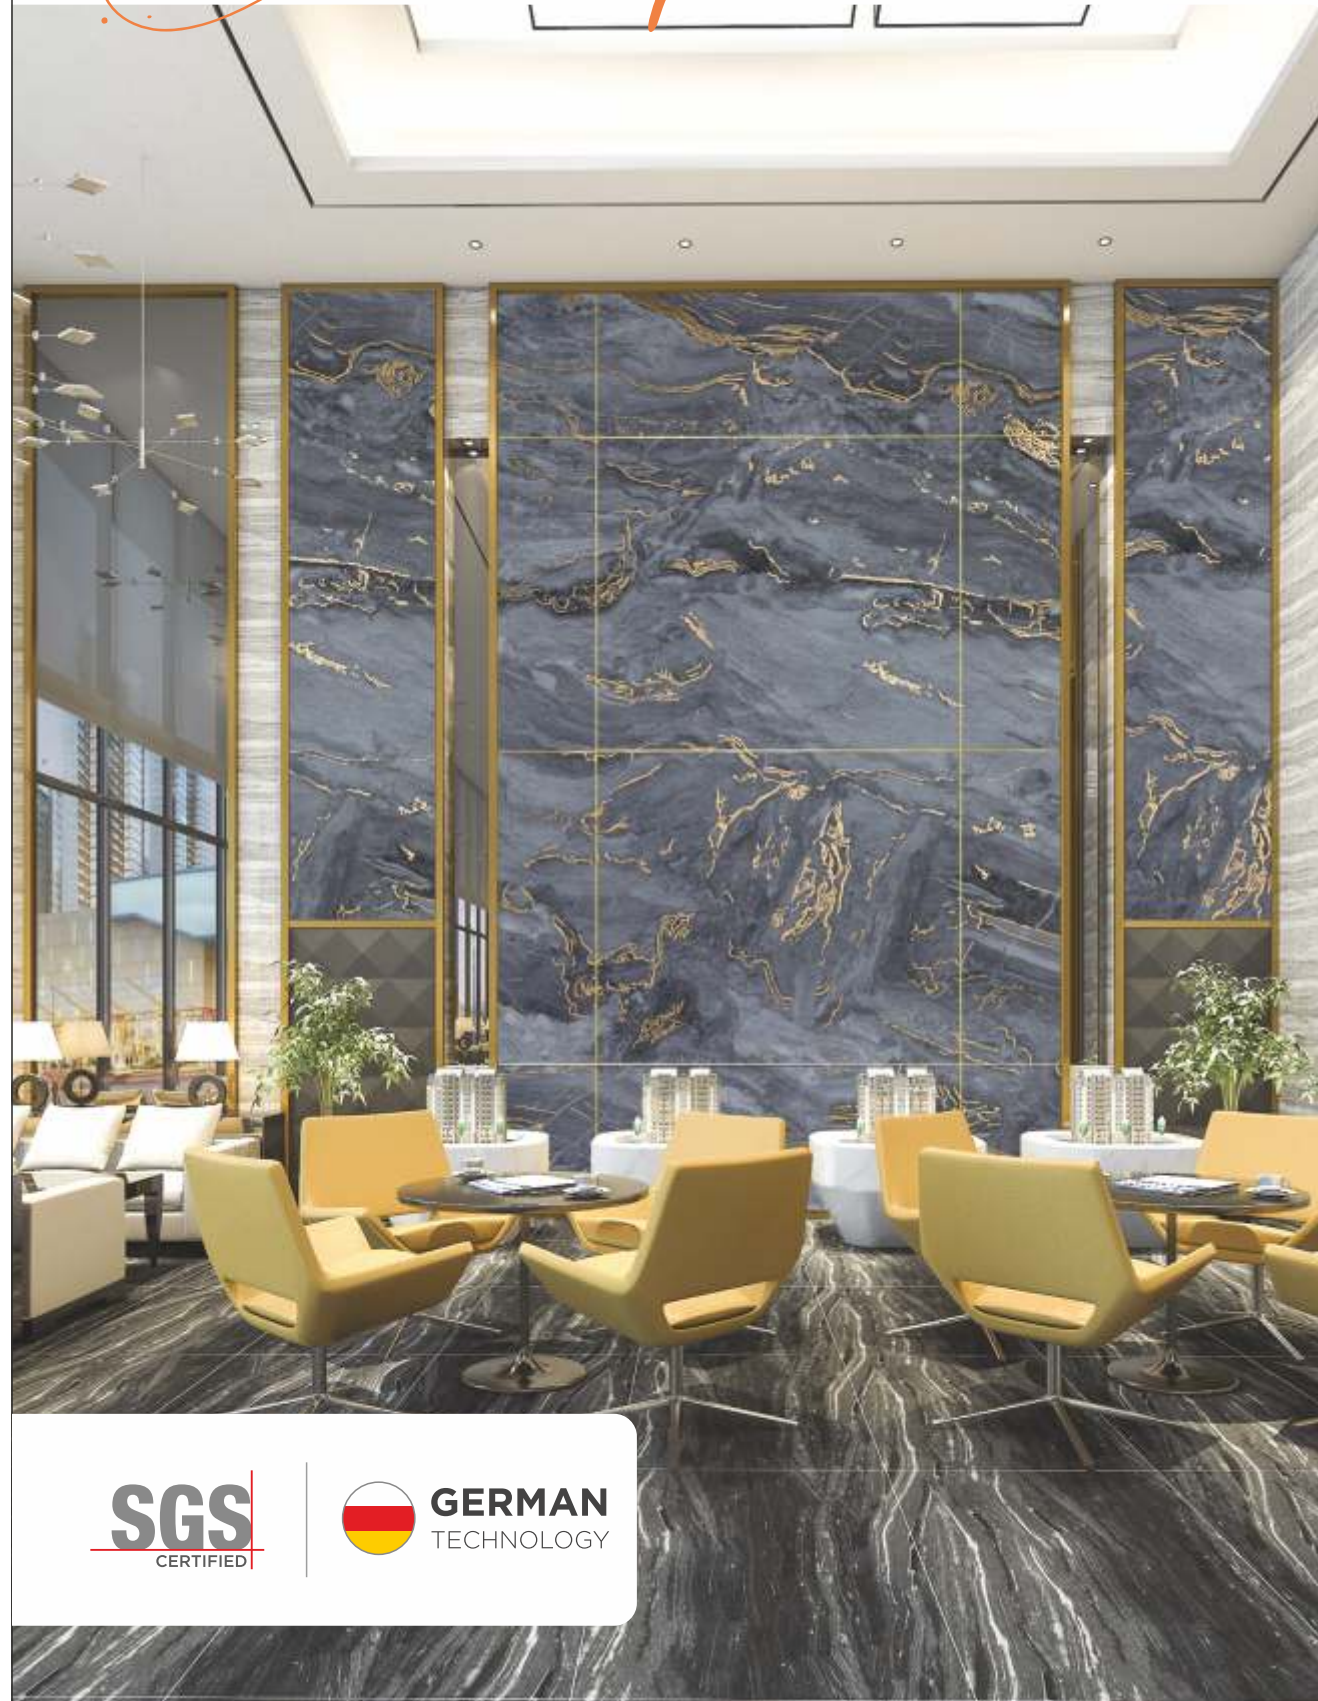

SGS  
CERTIFIED

GERMAN  
TECHNOLOGY



DIGITAL -3



DIGITAL



DIGITAL -3

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.



DIGITAL -4

AVITUS



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm  
ANTISCRATCH



01

02

# Luminescence



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY



DIGITAL -4




## DIGITAL



DIGITAL -5

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.


## AVITUS

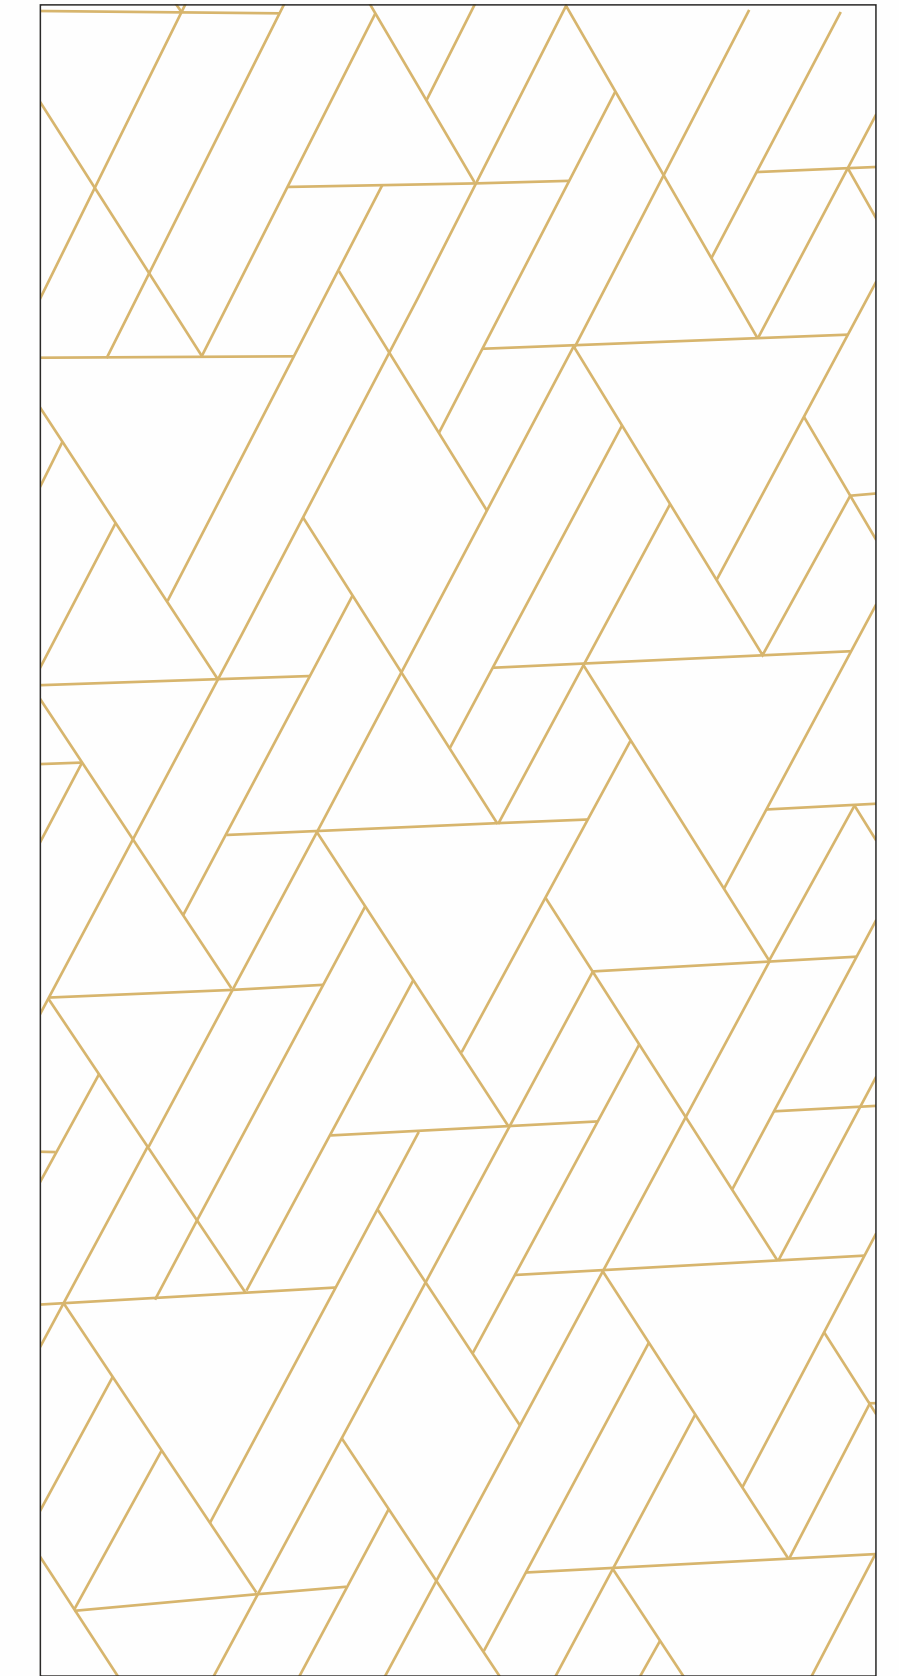

DIGITAL -6



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE




TERMITE  
RESISTANT



WATER  
RESISTANT



1.5 mm  
ANTISCRATCH



03

04

enormous



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH



## MARBLE SERIES

## AVITUS



2.75 INCH X 8 INCH

AV - SP 6



2.75 INCH X 8 INCH

AV - SP 5



AV - SP 6 FULL SHEET VIEW



AV - SP 5 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

*Opulent*



**SGS**  
CERTIFIED

**GERMAN**  
TECHNOLOGY

**6H**  
1.5 mm  
ANTISCRATCH



## MARBLE SERIES

## AVITUS




AV - SP 13



AV - SP 4



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

ultimate



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRAATCH



## MARBLE SERIES

## AVITUS



AV - SP 1



AV - SP 7



AV - SP 1 FULL SHEET VIEW



AV - SP 7 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE




TERMITE  
RESISTANT



WATER  
RESISTANT

*astounding*

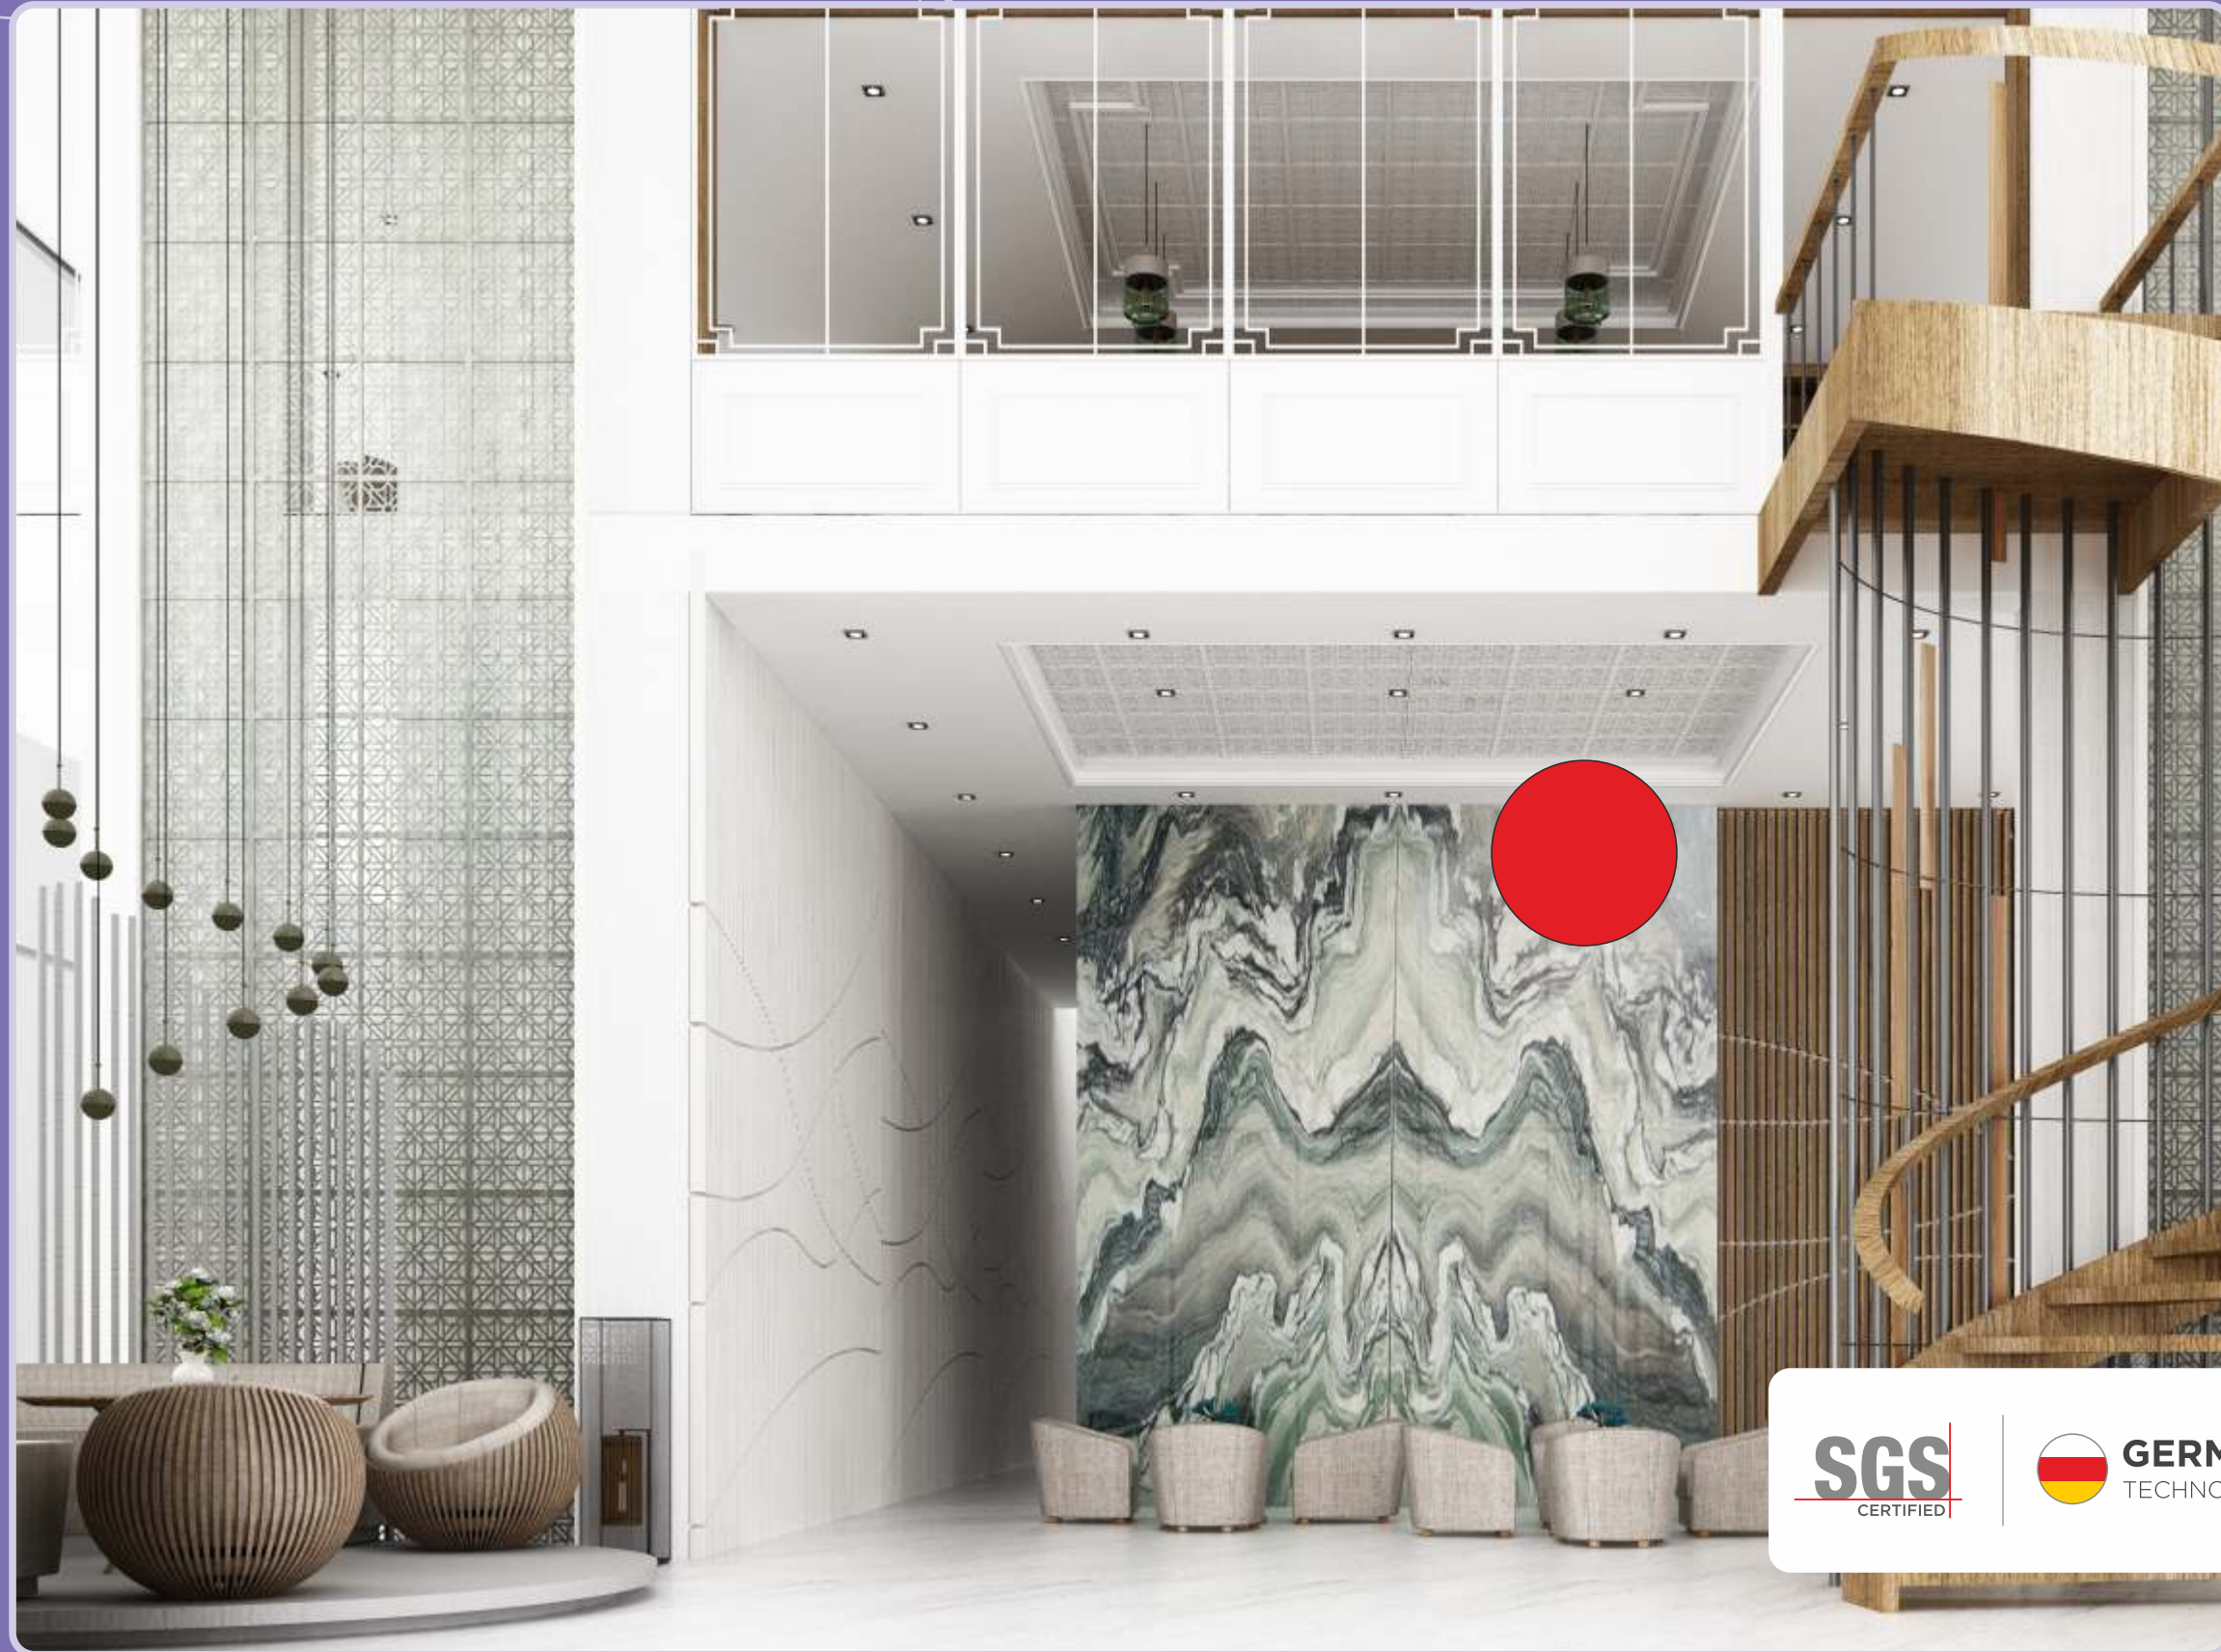

**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY

**6H**  
1.5 mm  
ANTISCRATCH




## MARBLE SERIES

## AVITUS



AV - SP 2

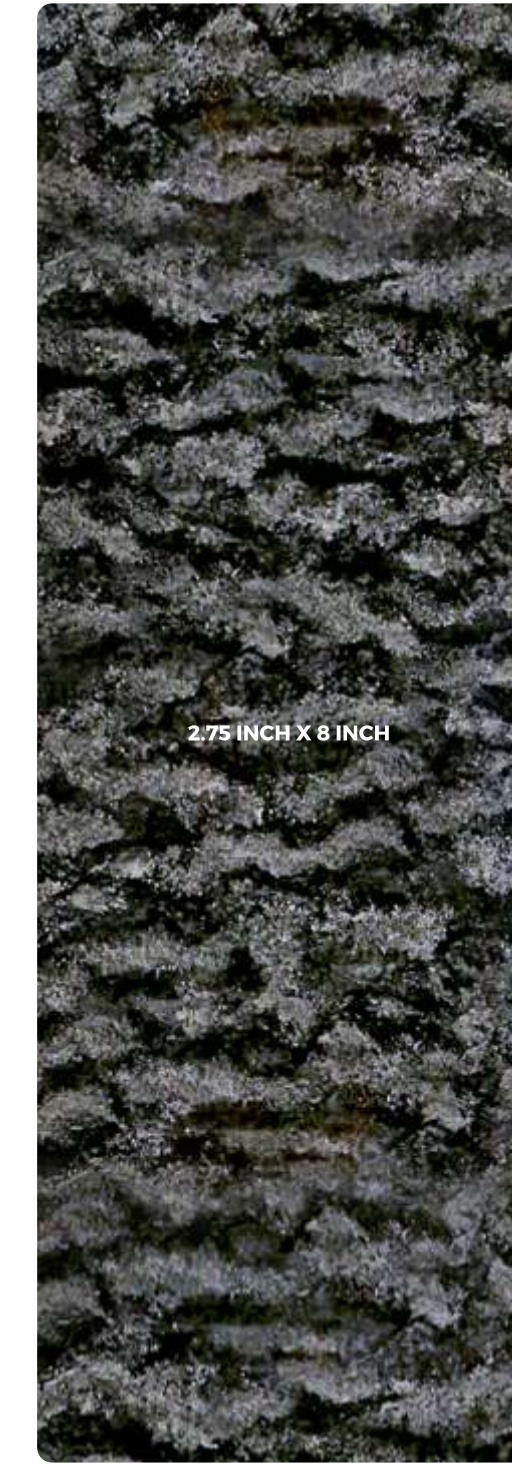

AV - SP 3



AV - SP 2 FULL SHEET VIEW



AV - SP 3 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*enchanting*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH



## SOLID SERIES

# AVITUS

2.75 INCH X 3.75 INCH

AV - 501

2.75 INCH X 3.75 INCH

AV - 502

2.75 INCH X 8 INCH

AV - 505

2.75 INCH X 3.75 INCH

AV - 507

2.75 INCH X 3.75 INCH

AV - 509



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

05

06



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*sophisticated*



**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY

  
1.5 mm  
ANTISCRATCH

## SOLID SERIES

## AVITUS




AV - 544



AV - 511



AV - 508

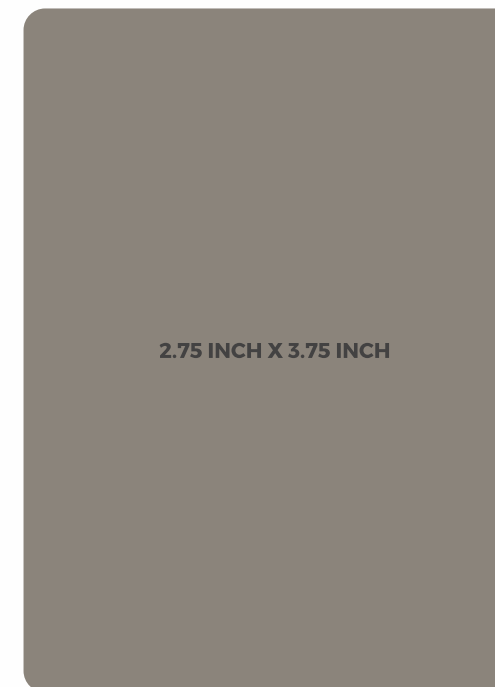


AV - 517



AV - 545



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



07

08

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*fascinating*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH

SOLID SERIES

AVITUS



AV - 522




AV - 514



AV - 506



AV - 523

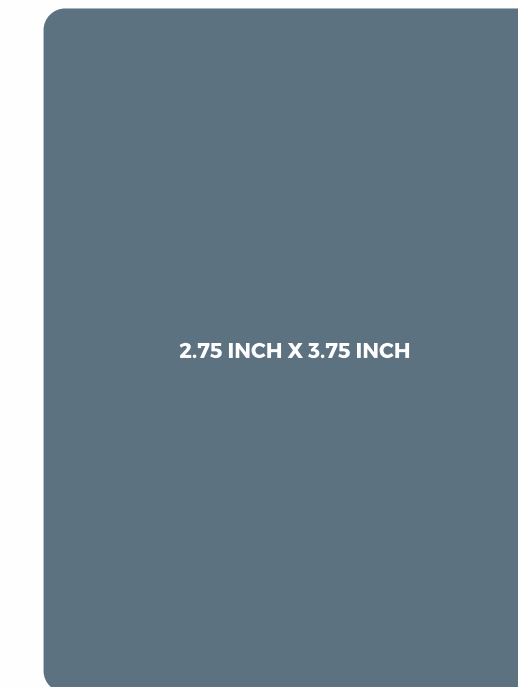

AV - 536



AV - 520



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



09

10

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

peerless



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH



## SOLID SERIES

## AVITUS

2.75 INCH X 3.75 INCH

AV - 503

2.75 INCH X 3.75 INCH

AV - 535

2.75 INCH X 8 INCH

AV - 530

2.75 INCH X 3.75 INCH

AV - 524

2.75 INCH X 3.75 INCH

AV - 525



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



11  
12



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*charming*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH



## SOLID SERIES

## AVITUS




AV - 519



AV - 531



AV - 518

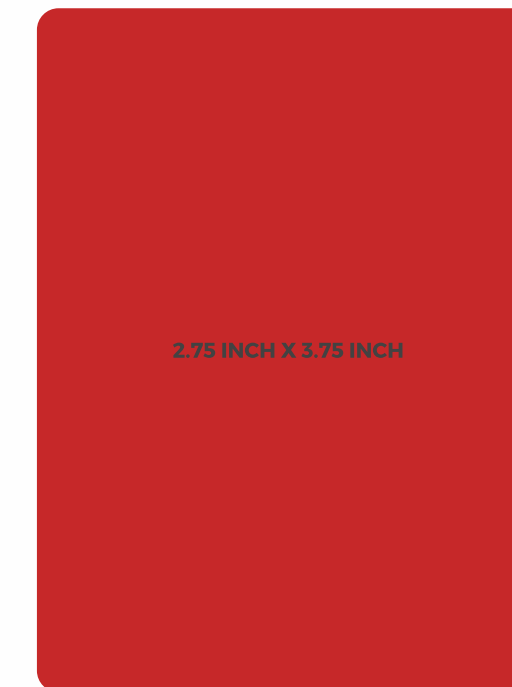

AV - 504



AV - 533



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*spectacular*



**SGS**  
CERTIFIED


**GERMAN**  
TECHNOLOGY

**6H**  
1.5 mm  
ANTISCRATCH

SOLID SERIES

AVITUS

<p>2.75 INCH X 3.75 INCH</p> <p>AV - 527</p>	<p>2.75 INCH X 3.75 INCH</p> <p>AV - 513</p>	<p>2.75 INCH X 3.75 INCH</p> <p>AV - 529</p>
<p>2.75 INCH X 3.75 INCH</p> <p>AV - 521</p>	<p>2.75 INCH X 3.75 INCH</p> <p>AV - 512</p>	<p>2.75 INCH X 3.75 INCH</p> <p>AV - 543</p>



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*bewitching*



**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY


**6H**  
1.5 mm  
ANTISCRATCH



## SOLID SERIES

## AVITUS

 <p>2.75 INCH X 3.75 INCH</p> <p>AV - 542</p>	 <p>2.75 INCH X 3.75 INCH</p> <p>AV - 537</p>	 <p>2.75 INCH X 3.75 INCH</p> <p>AV - 528</p>
 <p>2.75 INCH X 3.75 INCH</p> <p>AV - 540</p>	 <p>2.75 INCH X 3.75 INCH</p> <p>AV - 515</p>	 <p>2.75 INCH X 3.75 INCH</p> <p>AV - 510</p>



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*voguish*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH



## SOLID SERIES

## AVITUS



AV - 21



AV - 22




AV - 23



AV - 24



AV - 25

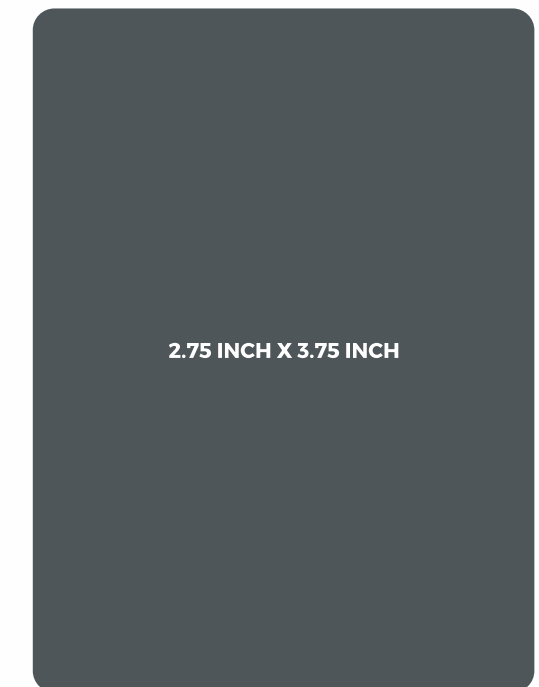

AV - 26



AESTHETIC  
LOOK



LONG  
LASTING




NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT



39  
40

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*radiant*



**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY


**6H**  
1.5 mm  
ANTISCRATCH

## SOLID SERIES

## AVITUS



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

 41  
 42  


There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

enticing



## MIRROR SERIES

## AVITUS

SELF ADHESIVE

APPLICATION METHOD




- Surface of Plywood /MDF must be dust free to use self adhesive mirror Acrylic sheet.
- For Better result It is advise to stick on matte finish surface laminate



SILVER MIRROR



GOLD MIRROR

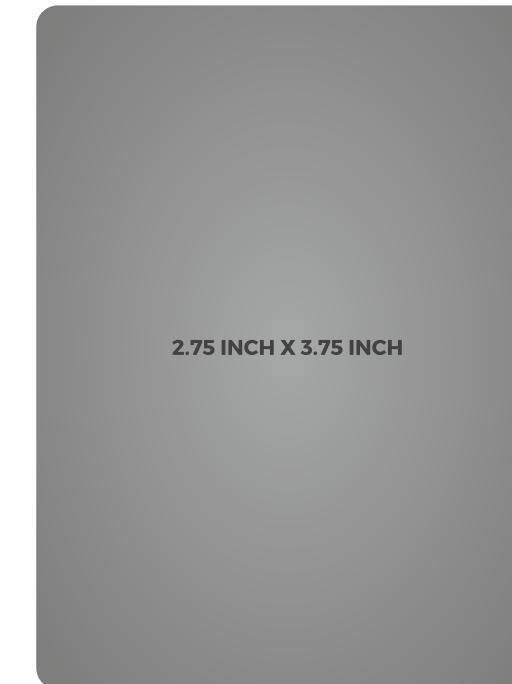

GREY MIRROR



COPPER MIRROR



AESTHETIC LOOK



LONG LASTING



NO FORMALDEHYDE



TERMITE RESISTANT



WATER RESISTANT




19

20

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

*exquisite*

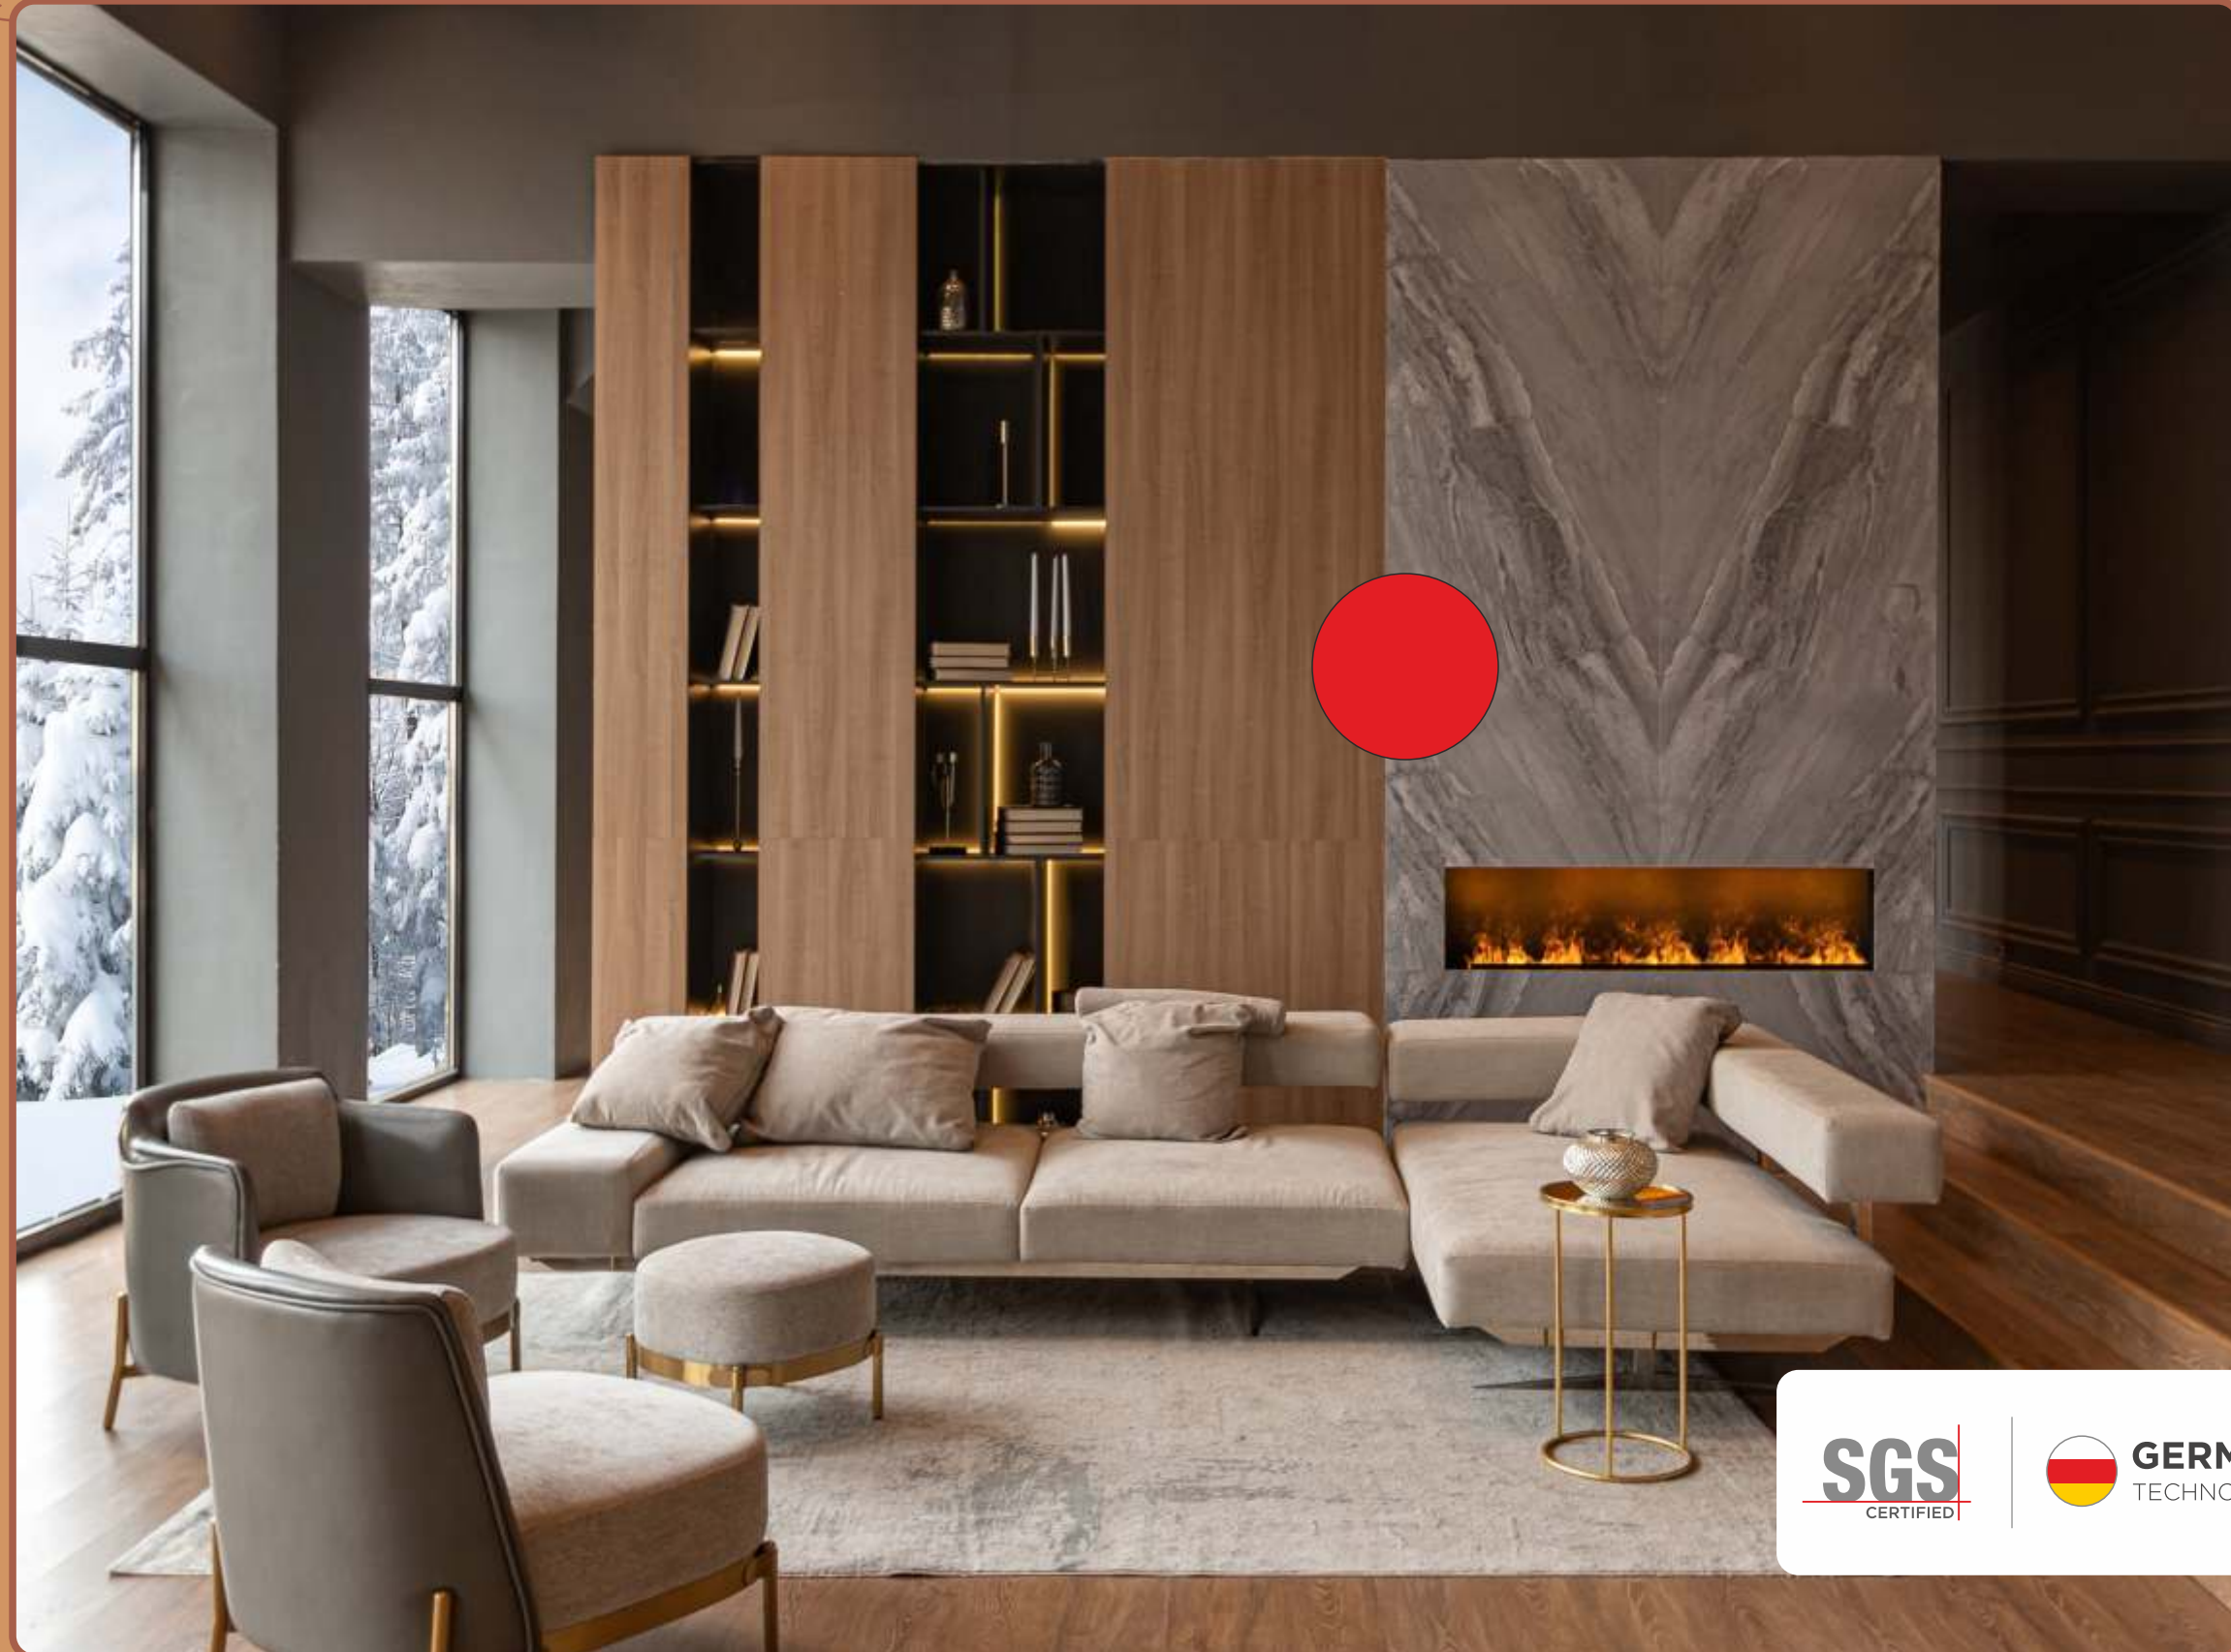

SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRAATCH



## WOODEN SERIES

## AVITUS



2.75 INCH X 8 INCH

AV - SP 21



2.75 INCH X 8 INCH

AV - SP 22



AV - SP 21 FULL SHEET VIEW



AV - SP 22 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT


29

30



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

marvellous

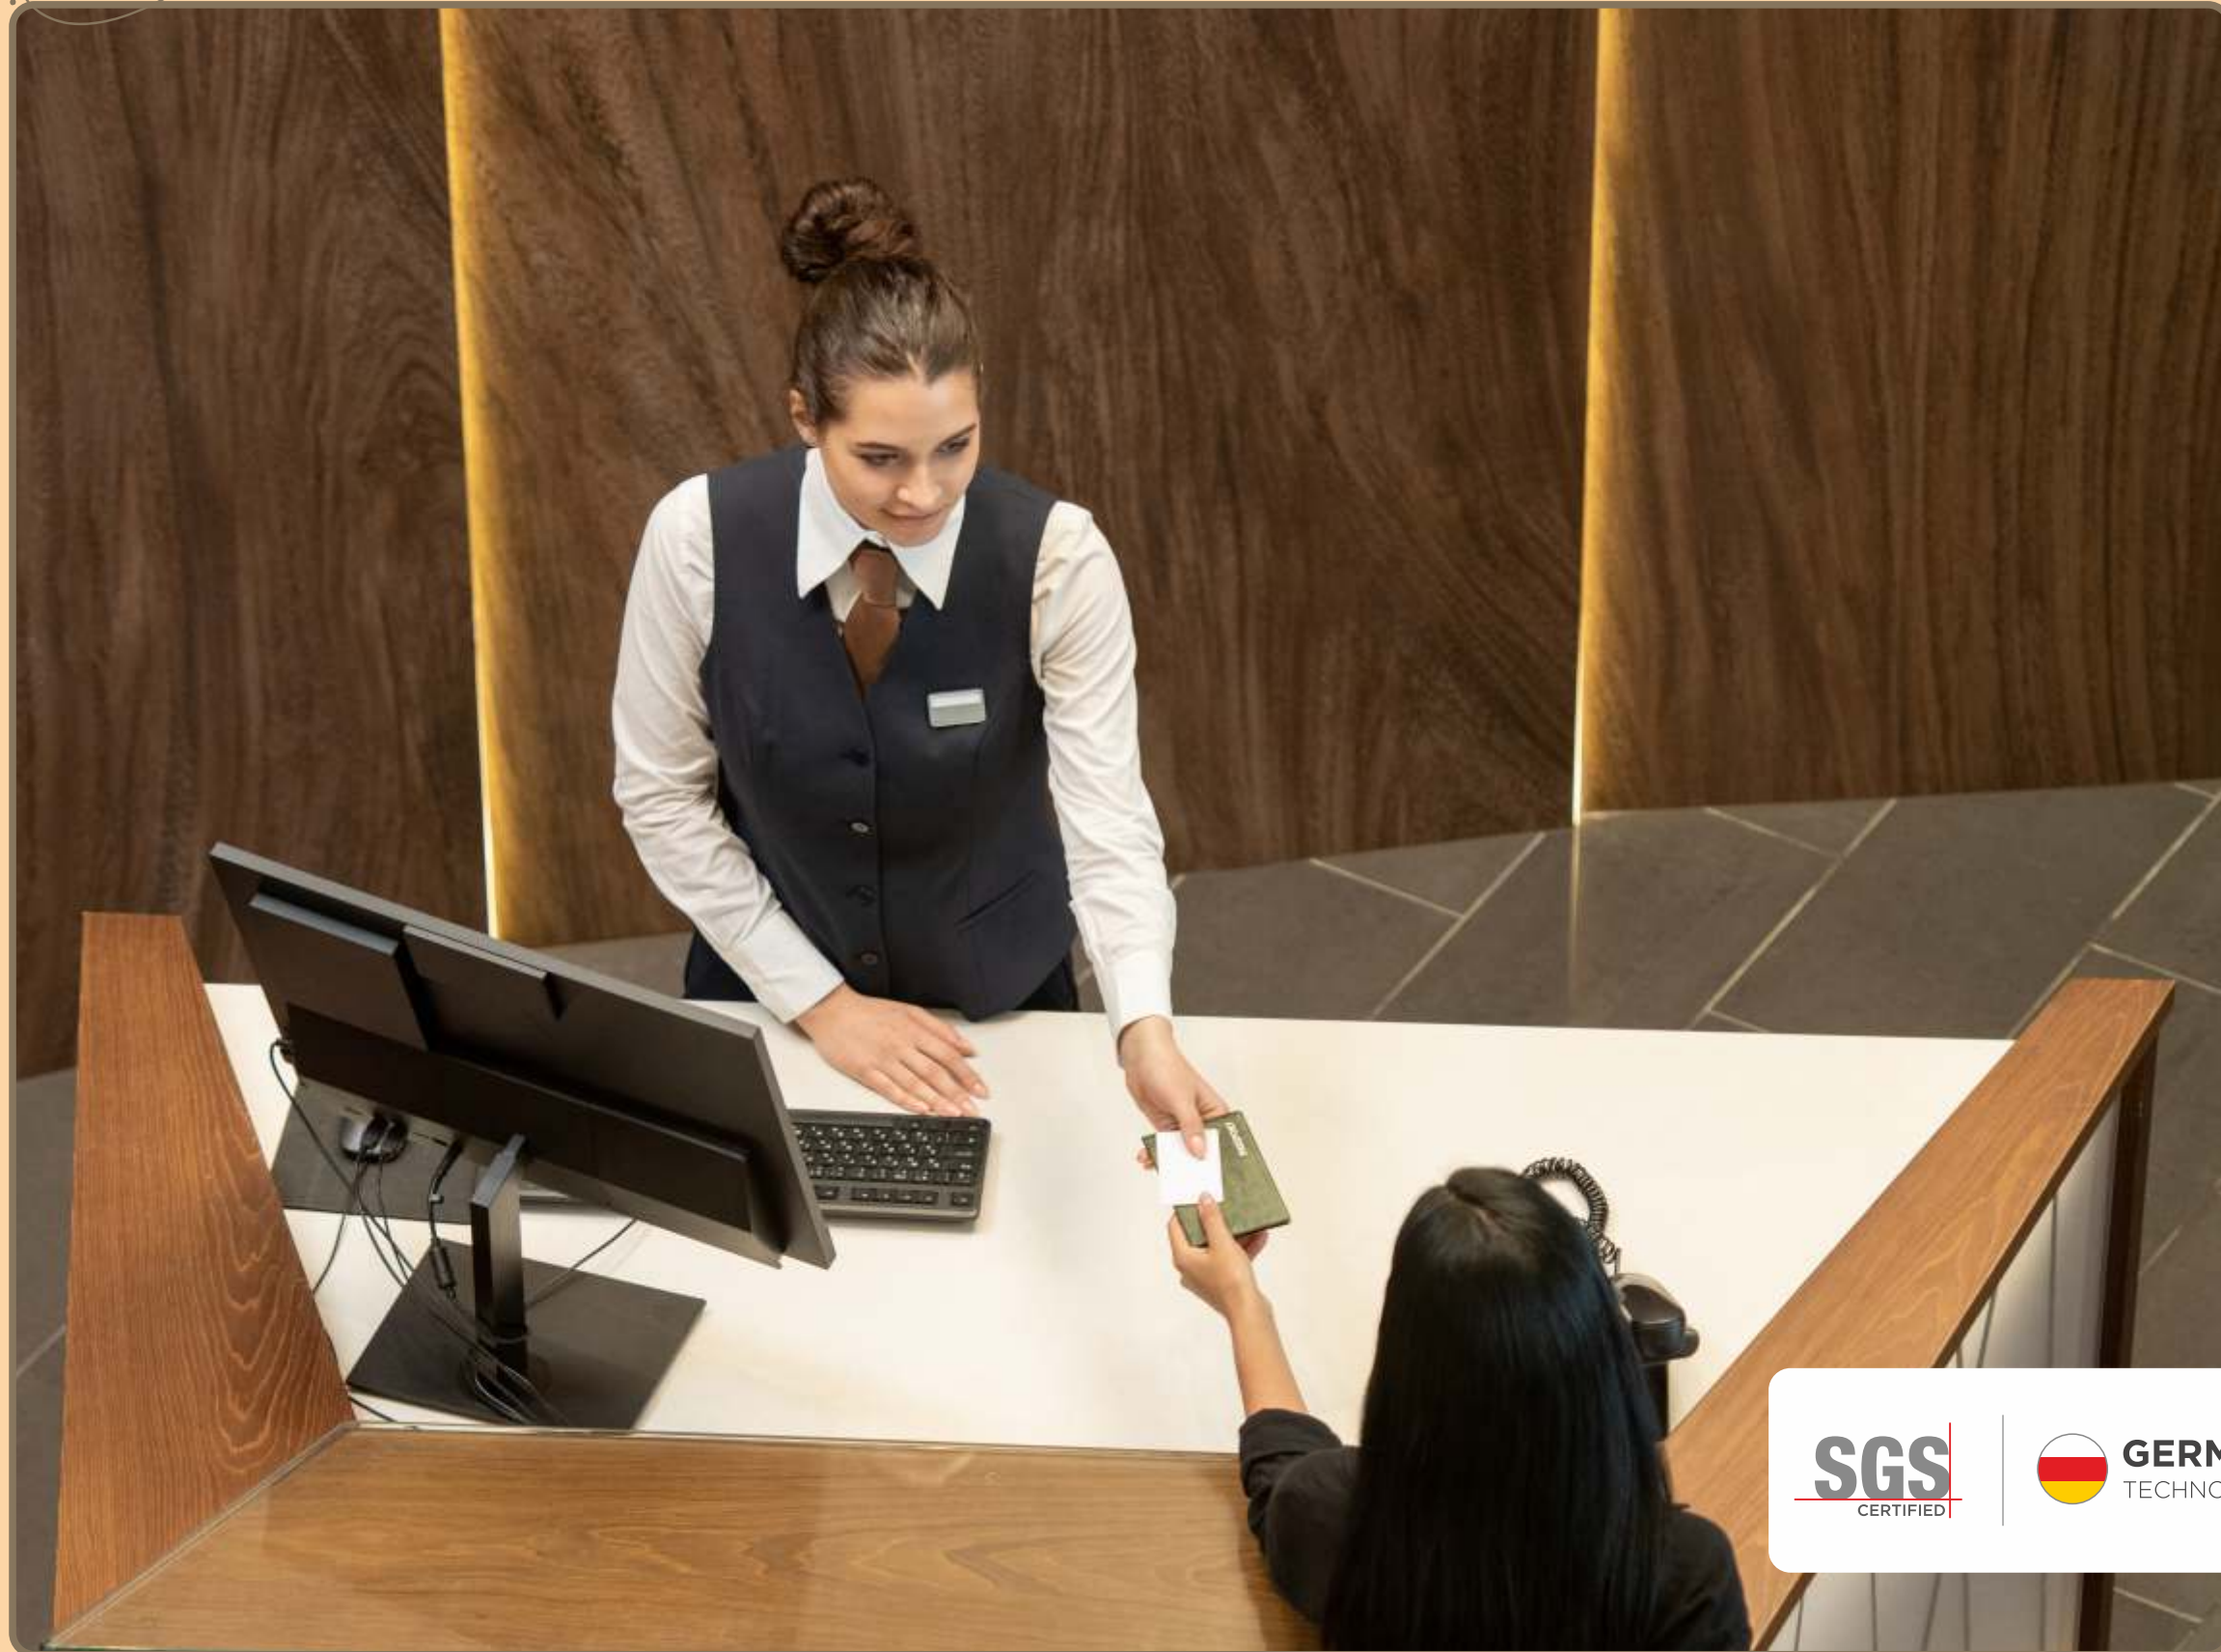

SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRAATCH




## WOODEN SERIES

## AVITUS



2.75 INCH X 8 INCH

AV - SP 24

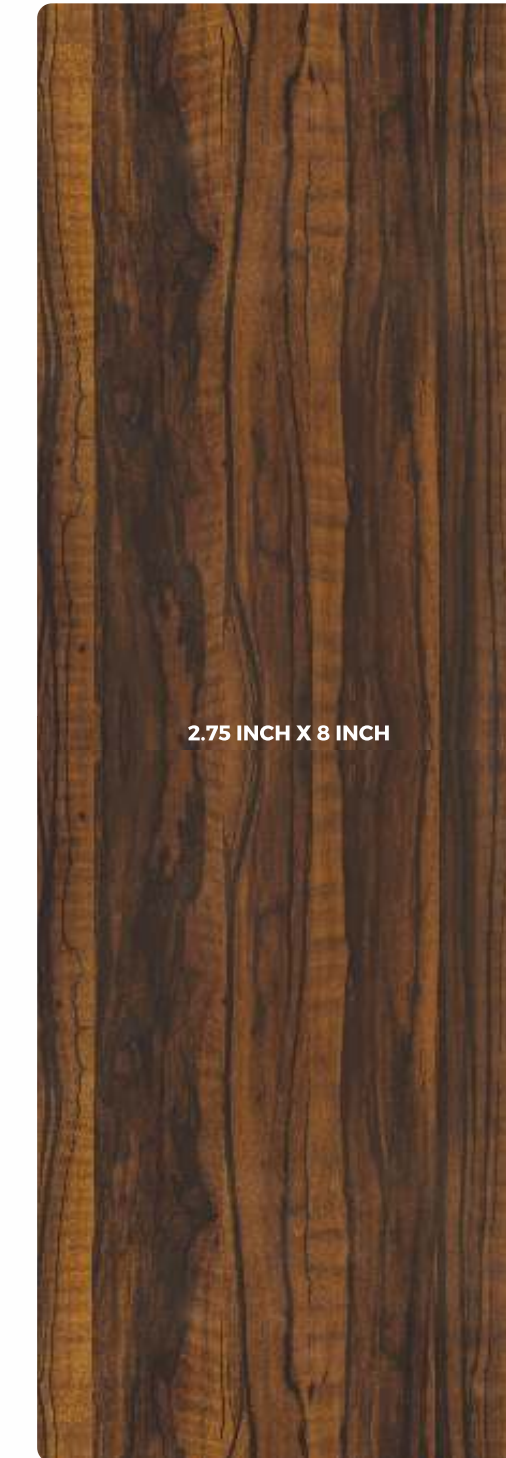

2.75 INCH X 8 INCH

AV - SP 23




AV - SP 24 FULL SHEET VIEW



AV - SP 23 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

*striking*



**SGS**  
CERTIFIED

 **GERMAN**  
TECHNOLOGY

**6H**  
1.5 mm  
ANTISCRATCH



## WOODEN SERIES

## AVITUS



2.75 INCH X 8 INCH

AV - SP 8



2.75 INCH X 8 INCH

AV - SP 9



AV - SP 8 FULL SHEET VIEW



AV - SP 9 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE



TERMITE  
RESISTANT



WATER  
RESISTANT

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.




*Stunning*



WOODEN SERIES


AVITUS

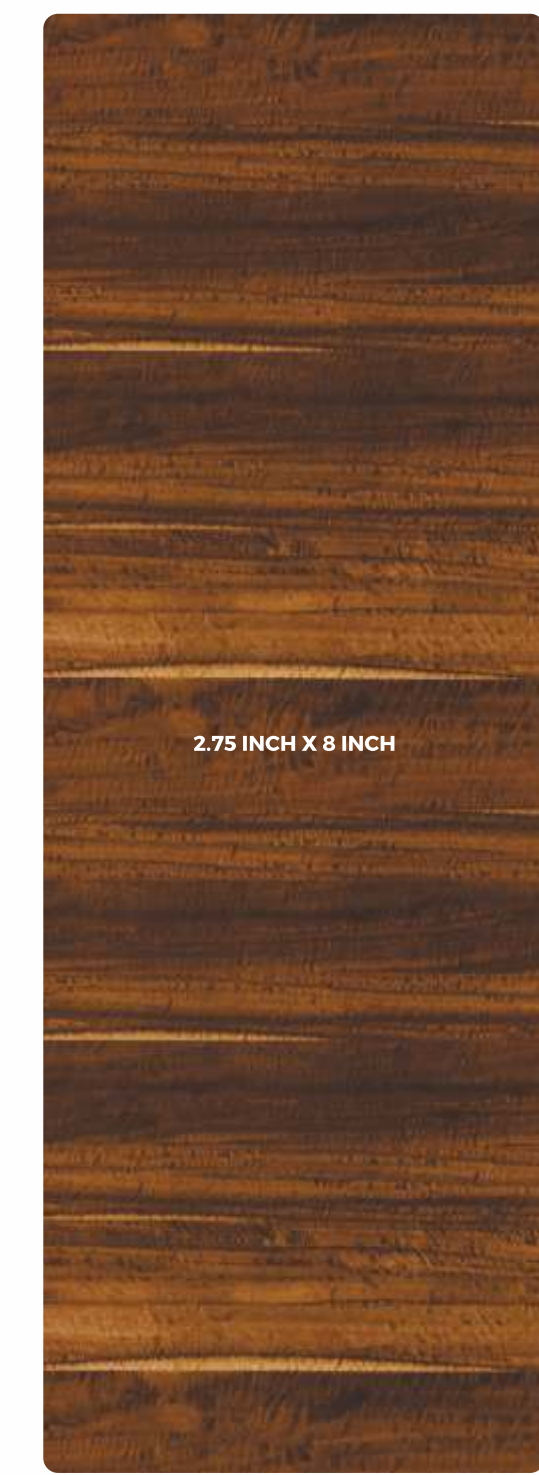

AV - SP 10

- AESTHETIC LOOK
- LONG LASTING
- NO FORMALDEHYDE
- TERMITE RESISTANT
- WATER RESISTANT

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.



*gorgeous*



SGS  
CERTIFIED

GERMAN  
TECHNOLOGY

6H  
1.5 mm  
ANTISCRATCH



## WOODEN SERIES

## AVITUS




2.75 INCH X 8 INCH

AV - SP 11



2.75 INCH X 8 INCH

AV - SP 12

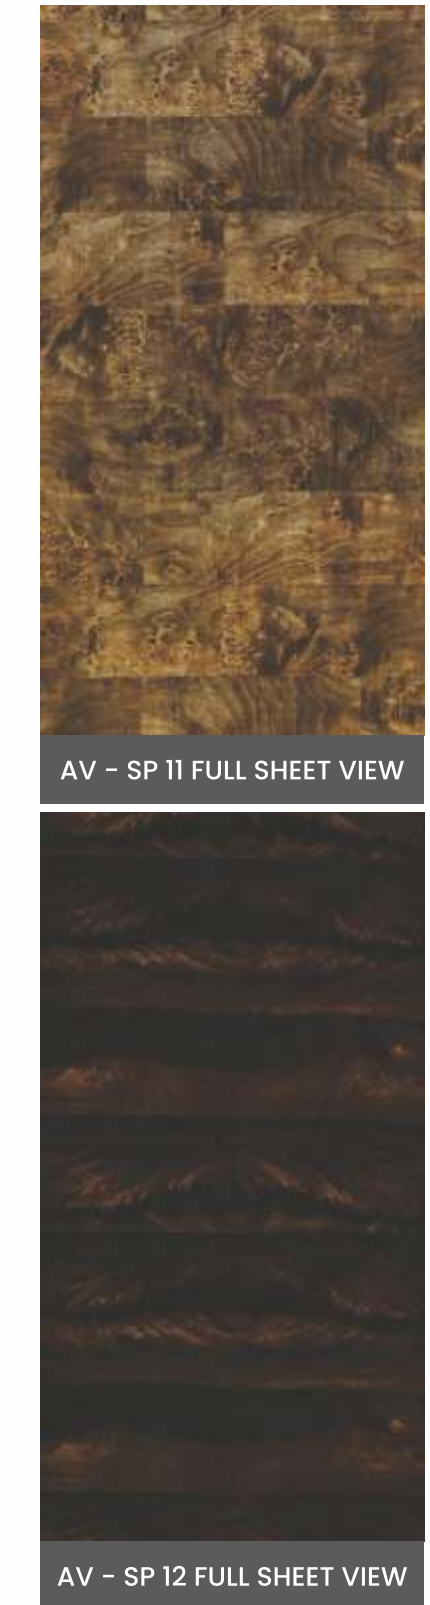

AV - SP 11 FULL SHEET VIEW

AV - SP 12 FULL SHEET VIEW



AESTHETIC  
LOOK



LONG  
LASTING



NO  
FORMALDEHYDE











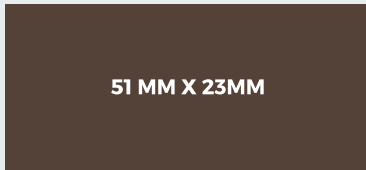













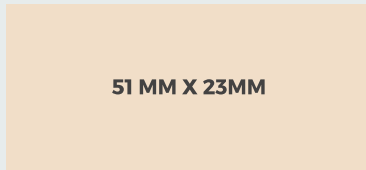




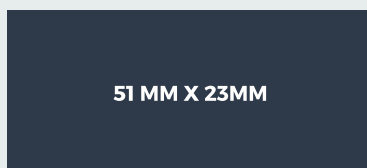


TERMITE  
RESISTANT

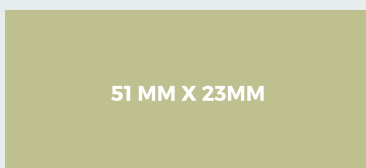

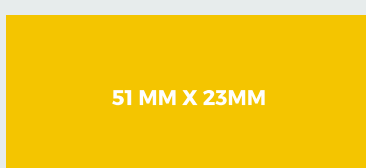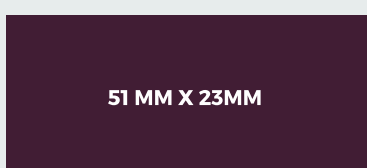



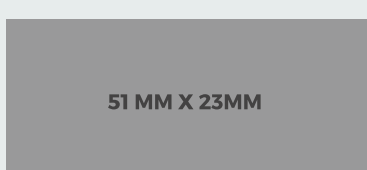



WATER  
RESISTANT

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminates sheet may vary from this brochure.

# EDGE BAND

 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 501	AV - 502	AV - 507	AV - 509	AV - 505
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 544	AV - 511	AV - 517	AV - 545	AV - 508
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 503	AV - 506	AV - 523	AV - 536	AV - 535
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 520	AV - 514	AV - 522	AV - 524	AV - 525
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 530	AV - 519	AV - 531	AV - 518	AV - 504
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 533	AV - 527	AV - 513	AV - 529	AV - 521

# AVITUS

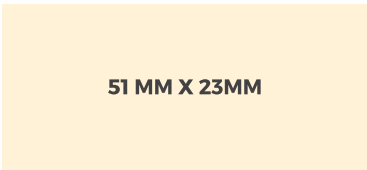
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM
AV - 512	AV - 543	AV - 542	AV - 537	AV - 528
 51 MM X 23MM	 51 MM X 23MM	 51 MM X 23MM		
AV - 540	AV - 515	AV - 510		

# EDGE BAND

WIDTH : 23mm THICKNESS : 1mm LENGTH : 50 Meters

EDGE BAND  
are available in all colours



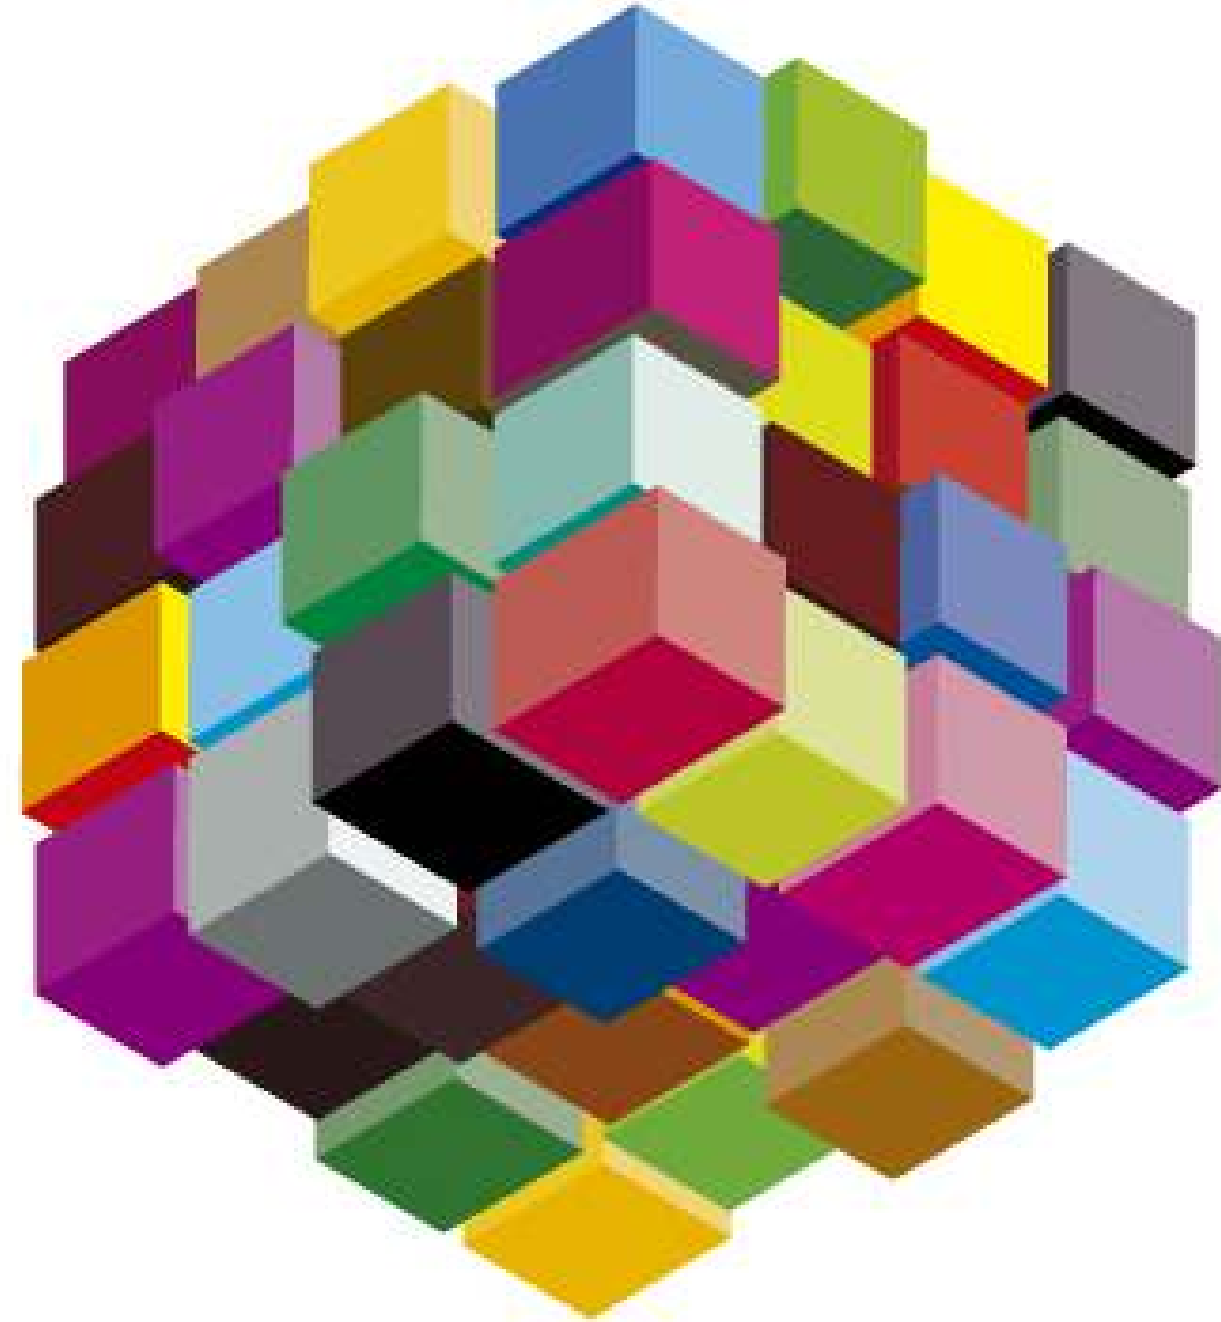

# INDEX

Design No.	Page No.	Colour
AV - 501	02	
AV - 502	02	
AV - 507	02	Black
AV - 509	02	Grey
AV - 505	02	Dark Grey
AV - 544	04	Light Tan
AV - 511	04	Light Tan
AV - 517	04	Dark Grey
AV - 545	04	Dark Brown
AV - 508	04	Light Brown
AV - 503	06	Light Green
AV - 506	06	Dark Green
AV - 523	06	Grey
AV - 536	06	Dark Blue
AV - 535	06	Light Green
AV - 520	06	Dark Blue
AV - 514	08	Blue
AV - 522	08	Blue



Design No.	Page No.	Colour	Design No.	Page No.	Colour	Design No.	Page No.	Colour
AV - 524	08	Light Green	AV - 515	14	Light Yellow	AV -SP 8	30	Wood
AV - 525	08	Dark Green	AV - 510	14	Wood	AV -SP 9	30	Wood
AV - 530	08	Light Green	SILVER	16	Silver	AV -SP 10	32	Wood
AV - 531	10	Dark Purple	GOLD	16	Gold	AV -SP 11	34	Wood
AV - 519	10	Yellow	GREY	16	Grey	AV -SP 12	34	Dark Wood
AV - 518	10	Light Yellow	COPPER	16	Copper	AV - 21	36	Yellow
AV - 504	10	Red	AV -SP 6	18	Light Grey	AV - 22	36	
AV - 533	10	Dark Brown	AV -SP 5	18	Light Grey	AV - 23	36	Dark Brown
AV - 527	12	Grey	AV -SP 13	20	Light Grey	AV - 24	36	Black
AV - 513	12	Grey	AV -SP 4	20	Dark Grey	AV - 25	36	Light Grey
AV - 529	12		AV -SP 1	22	Light Grey	AV - 26	36	Dark Grey
AV - 521	12	Dark Grey	AV -SP 7	22	Dark Grey	AV - 27	38	Teal
AV - 512	12	Grey	AV -SP 2	24	Dark Grey	AV - 28	38	
AV - 543	12	Light Grey	AV -SP 3	24	Dark Grey	AV - 29	38	Teal
AV - 542	14	Light Yellow	AV -SP 21	26	Wood	AV - 30	38	Pink
AV - 537	14	Grey	AV -SP 22	26	Wood	AV - 31	38	Light Yellow
AV - 528	14	Light Brown	AV -SP 24	28	Wood	AV - 32	38	Light Yellow
AV - 540	14	Dark Brown	AV -SP 23	28	Wood			



## REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS



Laminates are bonded in extremely humid conditions



Use of inferior or sub-standard dipped plywood or dipped lipping patti, which may chemically react with the adhesive



Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)




Exposure to direct sunlight can gravely affect a laminates's appearance



When substrate loses moisture after installation



Use of synthetic rubber adhesive SR / JAT PAT / HEATX



Deboning in certain areas because of uneven substrate surface



If hot cookware or utensils are directly placed on the laminate. Prolonged exposure to high temperature (above 30°C-35°C).



Use of extremely large acrylic/PVC laminate sheets (more than 8ft x 2 ft long)



Insufficient or lack of pressing during the bonding period of laminate



To avoid the inside cracks & stretch line Do not store acrylic sheet in roll form.

## CAUSES OF CRACK LINES OR STRETCH LINES IN AVITUS ACRYLIC LAMINATE SHEETS.

To avoid de lamination / air bubbles in between ply and LAMINATES the above steps should be taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity


## DISCLAIMER

- Do not use plywood with high moisture content
- Do not use ply with uneven surface
- Avoid using inferior quality adhesive
- Apply sufficient pressure
- We do not recommend pasting of sheets on the printed/branding area of the plywood



Parameters	AVITUS LAMINATES	High Gloss LAMINATES Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisratch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	Yes
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

## PANEL STRUCTURE

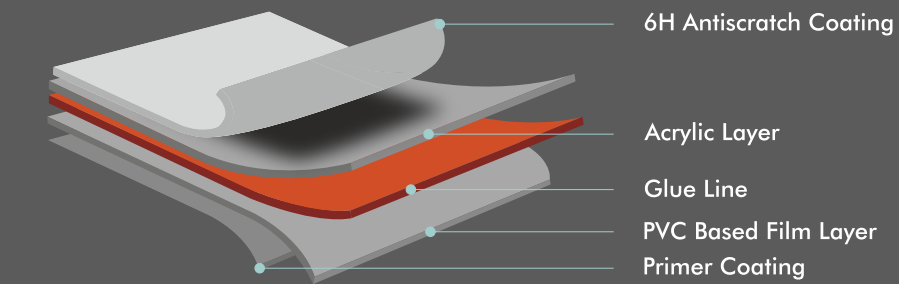

## LIMITED WARRANTY

AVITUS LAMINATES Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications with realistic deviations. we recommend customers to inspect properly before installing. AVITUS LAMINATES warranty in no way covers defects and non-compliance from or otherwise attributable to any other causes, including without limitation the following:

- Improper handling / transportation / storage of AVITUS LAMINATES
- Improper installation of AVITUS LAMINATES
- Improper or unintended usage of AVITUS LAMINATES
- Lack of or improper maintenance of AVITUS LAMINATES
- Exposure to high temperatures
- Unauthorized alteration to the products Outdoor applications
- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only. Actual colors may differ.